



# Stanilite® Product selection guide

Stanilite®





---

# 09

## Exit and emergency lighting

709	<b>Nexus® system</b>
713	<b>Spitfire®</b>
725	<b>Exit signs</b>
753	<b>Battens</b>
761	<b>Circular LED</b>
765	<b>Flood lights</b>







---

# Nexus® system

710

Nexus®



---

For more detailed product information, please refer to the Stanilite website:

- [www.stanilite.com.au](http://www.stanilite.com.au)



## Nexus®

### LX and RF components




#### Nexus RF area controller V2 product features

- 3 year warranty
- System head end controller. Nexus® RF database containing all system and unit information
- Co-ordinates up to 90 nodes
- Communicates to fittings via 918 - 925.8 MHz mesh network
- 7" colour graphical user interface LCD resistive touch screen - includes stylus
- Integrated web server for remote control
- Battery option allows the area controller to be used in mobile mode and features fast recharge capability
- Wall bracket

#### Nexus RF area controller V2

Order code	Description	Output
NACR-1	Nexus RF Area Controller - Router	Mains plug pack 240VAC 50/60Hz, 12VDC 3A max output
NAC-2	Nexus RF area controller with LCD display and battery	
Spare parts		
14-00211	Battery 6 cell NiMH 7.2V 2.3Ah	
02-ACBMV2	AC battery module V2	
02-NRFEIMV1	Nexus RF interface module V1	
32-WAMA014	Stylus - area controller	
32-00206	Plug pack 12V 3A	
		Memory
		SD micro flash memory 8GB
		1GB USB flash memory stick
		Jack and lead
		50 ohm SMA antenna jack
		2m blue Cat 5e UTP patch lead
		Connectivity
		Ethernet port for Lan/Wan connectivity
		USB A and USB B ports for connection to peripherals such as keyboard, mouse, modem, printer and laptop/PC

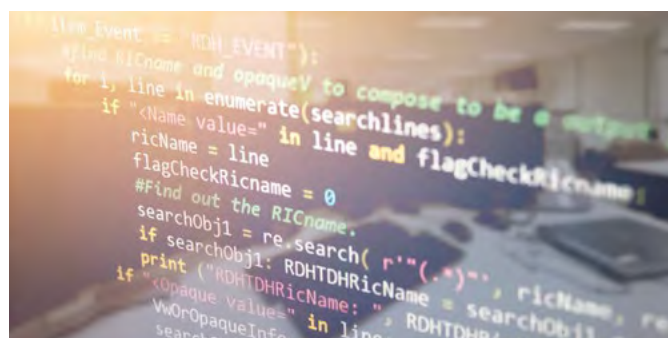

#### Nexus LX user pack including server with LCD 19" monitor

Order code	Description	Product features
NXSLXSERVERLCD	LCD 19" Monitor, 2GB RAM, Windows 7, 32 Bit Professional Dual Core 2.4GHz	PC with LCD 19" monitor
Spare parts		Server loaded with WIN 10 64 bit Pro
NXSNCB2	ILON 600 Lonworks/IP Server TP/FT-10 (240V)	License includes 64 device credits
NXSNCB3	ILON 600 Lonworks/IP Server TP/FT-10 (24V DC)	USB stick including Nexus LX software, Nexus user and technical guide
NXS-1PS/A-100	NXS-1PS/A-100 Cable Data Twisted Pair Screen 100m Roll	
NXS-1PS/A-500	Cable Data Twisted Pair Screen 500m Roll	
32-00203	USB FT10 Lonworks I/F	
HXSROUT	HXS ROUTER TP78/TP78	
HXSROUT/2	HXS ROUTER TP78/FT10	

STOCK    INDENT









---

# Spitfire®

<b>714</b>	<b>e-Range</b>
<b>716</b>	<b>s-Range</b>
<b>720</b>	<b>p-Range</b>
<b>722</b>	<b>Accessories</b>



---

For more detailed product information, please refer to the Stanilite website:

- [www.stanilite.com.au](http://www.stanilite.com.au)



Spitfire® LED

e-Range



**Spitfire e-Range product features**

- 1 year warranty
- LED technology 75,000 hours lamp life
- Low power consumption
- High temperature NiCad batteries



**Spitfire® Recessed**

- Lithium iron phosphate battery
- Flex and plugs included
- 100,000 hours LEDs
- D40 photometric classification
- White adaptors included to convert standard 94mm lamp head to 145mm diameter

Description	Order code	Replacement of
Spitfire recessed	ECOSPITFIRE	ESFLED



---

# DALI emergency lighting

Integration for safe monitoring  
in smart buildings

DALI emergency lighting from ABB can easily provide a safe and reliable solution to meet smart building emergency lighting requirements. Tests run automatically to ensure your building is safely lit, with downloadable reports to prove it. Low-cost installation with low-cost maintenance. ABB and DALI: the smart way to install emergency lighting. [new.abb.com/low-voltage](https://new.abb.com/low-voltage)





## Spitfire® LED

### s-Range



#### Spitfire s-Range product features

- 3 year warranty
- Superior photometric classification
- LED technology 100,000 hours lamp life
- Single or dual LED option
- High temperature NiCad batteries

#### Signature Spitfire LED recessed non-maintained



Order code	Description	Mounting
<b>Standard products</b>		Recessed
SF1LED	LED Spitfire single recessed	
SF2LED	LED Spitfire dual recessed	
<b>Spare parts</b>		
03-01220	Battery 5 cell NiCad 6.0V 1.8Ah	
<b>Additional features</b>		
Spring fixing design allows for different ceiling thickness (1mm – 20mm)		
Metal trim covers available in black or stainless steel finish		

**Note:** For Accessories – refer to page 722

#### Signature Spitfire LED surface mount non-maintained



Catalogue no.	Description	Mounting
<b>Standard products</b>		Surface mount
SFB1LED	LED Spitfire single surface mount	
SFB2LED	LED Spitfire dual surface mount	
<b>Spare parts</b>		
03-01220	Battery 5 cell NiCad 6.0V 1.8Ah	
<b>Additional features</b>		
Low maintenance - ideal for factories and warehouses		

## Spitfire® LED


s-Range | Nexus®



### Spitfire s-Range Nexus product features


- 3 year warranty
- Superior photometric classification
- LED technology 100,000 hours lamp life
- Single or dual LED option
- High temperature NiCad batteries
- Nexus® monitored, either cabled or wireless

### Signature Spitfire LED recessed Nexus non-maintained

	Order code	Description	Mounting
	Nexus products		Recessed
	SFNXS1LED	LED Spitfire single Nexus LX recessed	
	SFNXS2LED	LED Spitfire dual Nexus LX recessed	
	SFNRF1LED	LED Spitfire single Nexus RF recessed	
	SFNRF2LED	LED Spitfire dual Nexus RF recessed	
Spare parts			
	03-01220	Battery 5 cell NiCad 6.0V 1.8Ah	
Additional features			
Spring fixing design allows for different ceiling thickness (1mm – 20mm)			
Metal trim covers available in black or stainless steel finish			

**Note:** For Accessories – refer to page 722

### Signature Spitfire LED surface mount Nexus non-maintained

	Order code	Description	Mounting
	Nexus products		Surface mount
	SFBNXS1LED	LED Spitfire single Nexus LX surface mount	
	SFBNXS2LED	LED Spitfire dual Nexus LX surface mount	
	SFBNRF1LED	LED Spitfire single Nexus RF surface mount	
	SFBNRF2LED	LED Spitfire dual Nexus RF surface mount	
Spare parts			
	03-01220	Battery 5 cell NiCad 6.0V 1.8Ah	
Additional features			
Low maintenance - ideal for factories and warehouses			





## Spitfire® LED weatherproof

s-Range

### Spitfire s-Range product features

- 3 year warranty
- Superior photometric classification
- LED technology 100,000 hours lamp life
- Single or dual LED option
- High temperature NiCad batteries

### Signature Spitfire LED weatherproof non-maintained



Order code	Description	Mounting
<b>Standard products</b>		Surface mount
SFBWP1LED	LED Spitfire single weatherproof surface mount	<b>IP rating</b> IP67
SFBWP2LED	LED Spitfire single weatherproof dual mount	
<b>Spare parts</b>		
03-01220	Battery 5 cell NiCad 6.0V 1.8Ah	
<b>Additional features</b>		
Polycarbonate IP67 weatherproof enclosure		
Low maintenance - ideal for car parks		

### Signature Spitfire LED weatherproof remote lamp head and power supply unit



Order code	Description	Mounting
<b>Standard products</b>		Surface mount
SFBWP1LEDLHREM	LED Spitfire single weatherproof surface mount remote lamp head	<b>IP rating</b> IP67
SFBWP2LEDLHREM	LED Spitfire dual weatherproof surface mount remote lamp head	
SFBWPLEDPSU	LED Spitfire weatherproof surface mount power supply unit	
<b>Spare parts</b>		
03-01220	Battery 5 cell NiCad 6.0V 1.8Ah	
<b>Additional features</b>		
Polycarbonate IP67 weatherproof enclosure		
Lamp head -30°C operation		
Lamp head used in combination with remote power supply lamp head mounted inside the freezer or coolroom and remote power supply mounted outside		

## Spitfire® LED weatherproof

s-Range | Nexus®



### Spitfire s-Range Nexus product features

- 3 year warranty
- Superior photometric classification
- LED technology 100,000 hours lamp life
- Single or dual LED option
- High temperature NiCad batteries
- Nexus® monitored, either cabled or wireless

### Signature Spitfire LED weatherproof Nexus non-maintained



Order code	Description	Mounting
<b>Nexus products</b>		Surface mount
SFBWPNXS1LED	LED Spitfire single Nexus LX weatherproof surface mount	<b>IP rating</b> IP67
SFBWPNXS2LED	LED Spitfire dual Nexus LX weatherproof surface mount	
SFBWPNRF1LED	LED Spitfire single Nexus RF weatherproof surface mount	
SFBWPNRF2LED	LED Spitfire dual Nexus RF weatherproof surface mount	
<b>Spare parts</b>		
03-01220	Battery 5 cell NiCad 6.0V 1.8Ah	
<b>Additional features</b>		
Polycarbonate IP67 weatherproof enclosure		
Low maintenance - ideal for carpark		

### Signature Spitfire LED weatherproof remote lamp head and power supply unit Nexus®



Order code	Description	Mounting
<b>Standard products</b>		Surface mount
SFBWP1LEDLHREM	LED Spitfire single weatherproof surface mount remote lamp head	<b>IP rating</b> IP67
SFBWP2LEDLHREM	LED Spitfire dual weatherproof surface mount remote lamp head	
SFBWPNXSLEDPSU	LED Spitfire weatherproof surface mount Nexus LX power supply unit	
SFBWPNRFLEDPSU	LED Spitfire weatherproof surface mount Nexus RF power supply unit	
<b>Spare parts</b>		
03-01220	Battery 5 cell NiCad 6.0V 1.8Ah	
<b>Additional features</b>		
Polycarbonate IP67 weatherproof enclosure		
Lamp head -30°C operation		
Lamp head used in combination with remote power supply lamp head mounted inside the freezer or coolroom and remote power supply mounted outside		



## Spitfire® LED


p-Range



### Spitfire p-Range product features


- 5 year warranty
- Superior photometric classification
- LED technology 100,000 hours plus lamp life
- Single or dual LED option
- Advance charging technology combined with Lithium iron phosphate battery for long life and low maintenance

### Platinum Spitfire LED recessed non-maintained


	Order code	Description	Mounting
	<b>Standard products</b>		Recessed
	SF1LEDP	LED platinum Spitfire single recessed	
	SF2LEDP	LED platinum Spitfire dual recessed	
	<b>Spare parts</b>		
	03-01301P	Battery LiFePO4 3.2V 3.2Ah (suits single LED)	
	03-01303P	Battery LiFePO4 3.2V 4.5Ah (suits dual LED)	
	<b>Additional features</b>		
	Spring fixing design allows for different ceiling thickness (1mm – 20mm)		
	Metal trim covers available in black or stainless steel finish		

**Note:** For Accessories – refer to page 722

### Platinum Spitfire LED surface mount non-maintained

	Order code	Description	Mounting
	<b>Standard products</b>		Surface mount
	SFB1LEDP	LED platinum Spitfire single surface mount	
	SFB2LEDP	LED platinum Spitfire dual surface mount	
	<b>Spare parts</b>		
	03-01301P	Battery LiFePO4 3.2V 3.2Ah (suits single LED)	
	03-01303P	Battery LiFePO4 3.2V 4.5Ah (suits dual LED)	
	<b>Additional features</b>		
	Low maintenance - ideal for factories and warehouses		

### Platinum Spitfire LED weatherproof non-maintained

	Order code	Description	Mounting
	<b>Standard products</b>		Surface mount
	SFBWP1LEDP	LED platinum Spitfire single weatherproof surface mount	
	SFBWP2LEDP	LED platinum Spitfire dual weatherproof surface mount	
	<b>Spare parts</b>		IP67
	03-01301P	Battery LiFePO4 3.2V 3.2Ah (suits single LED)	
	03-01303P	Battery LiFePO4 3.2V 4.5Ah (suits dual LED)	
	<b>Additional features</b>		
	Polycarbonate IP67 weatherproof enclosure		
	Low maintenance - ideal for carparks		

## Spitfire® LED


p-Range | Nexus®



### Spitfire p-Range Nexus product features


- 5 year warranty
- Superior photometric classification
- LED technology 100,000 hours plus lamp life
- Single or dual LED option
- Advance charging technology combined with Lithium iron phosphate battery for long life and low maintenance
- Nexus® monitored, either cabled or wireless

### Platinum Spitfire LED recessed Nexus non-maintained


	Order code	Description	Mounting
	Nexus products		Recessed
	SFNXS1LEDP	LED platinum Spitfire single Nexus LX recessed	
	SFNXS2LEDP	LED platinum Spitfire dual Nexus LX recessed	
	SFNRF1LEDP	LED platinum Spitfire single Nexus RF recessed	
	SFNRF2LEDP	LED platinum Spitfire dual Nexus RF recessed	
	Spare parts		
	03-01301P	Battery LiFePO4 3.2V 3.2Ah (suits single LED)	
	03-01303P	Battery LiFePO4 3.2V 4.5Ah (suits dual LED)	
	Additional features		
	Spring fixing design allows for different ceiling thickness (1mm – 20mm)		
	Metal trim covers available in black or stainless steel finish		

**Note:** For Accessories – refer to page 722

### Platinum Spitfire LED surface mount Nexus non-maintained

	Order code	Description	Mounting
	Nexus products		Surface mount
	SFBNXS1LEDP	LED platinum Spitfire single Nexus LX surface mount	
	SFBNXS2LEDP	LED platinum Spitfire dual Nexus LX surface mount	
	SFBNRF1LEDP	LED platinum Spitfire single Nexus RF surface mount	
	SFBNRF2LEDP	LED platinum Spitfire dual Nexus RF surface mount	
	Spare parts		
	03-01301P	Battery LiFePO4 3.2V 3.2Ah (suits single LED)	
	03-01303P	Battery LiFePO4 3.2V 4.5Ah (suits dual LED)	
	Additional features		
	Low maintenance - ideal for factories and warehouses		

### Platinum Spitfire LED weatherproof Nexus non-maintained

	Order code	Description	Mounting
	Nexus products		Surface mount
	SFBWPNXS1LEDP	LED platinum Spitfire single Nexus LX weatherproof surface mount	
	SFBWPNXS2LEDP	LED platinum Spitfire dual Nexus LX weatherproof surface mount	
	SFBWPNRF1LEDP	LED platinum Spitfire single Nexus RF weatherproof surface mount	
	SFBWPNRF2LEDP	LED platinum Spitfire dual Nexus RF weatherproof surface mount	
	Spare parts		
	03-01301P	Battery LiFePO4 3.2V 3.2Ah (suits single LED)	
	03-01303P	Battery LiFePO4 3.2V 4.5Ah (suits dual LED)	
	Additional features		
	Polycarbonate IP67 weatherproof enclosure		
	Low maintenance - ideal for car parks		



## Spitfire® LED

### Accessories



Round trim stainless steel

Order code	Description
02-SF1LSSTRIM	Single LED round trim stainless steel
02-SF2LSSTRIM	Dual LED round trim stainless steel



Round trim black

Order code	Description
02-SF1LBLTRIM	Single LED round trim black
02-SF2LBLTRIM	Dual LED round trim black



Square trim stainless steel

Order code	Description
02-SF1LSQSSTRIM	Single LED with square adaptor trim stainless steel
02-SF2LSQSSTRIM	Dual LED with square adaptor trim stainless steel



Square trim black

Order code	Description
02-SF1LSQBLTRIM	Single LED with square adaptor trim black
02-SF2LSQBLTRIM	Dual LED with square adaptor trim black



White square adaptor

Order code	Description
02-SFLEDSQADAPT	White plastic square adaptor for LED Spitfire




Black adaptor kit

Order code	Description
02-SFLEDLGBLKIT	Black adaptor kit

Vandal and weather resistant recessed Spitfire lamp head kit

Order code	Description
SFLEDVRWR-KIT	Vandal and weather resistant kit to suit the 60mm recessed lamp head

STOCK INDENT

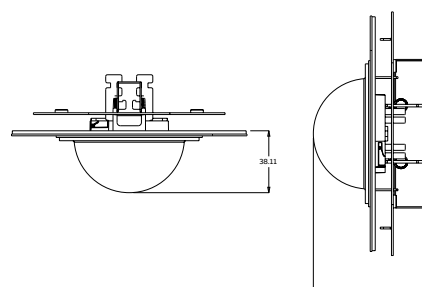

## Notes





---

# Exit signs

**726**                      **e-Range**

**728**                      **s-Range**

**736**                      **p-Range**



---

For more detailed product information, please refer to the Stanilite website:

- [www.stanilite.com.au](http://www.stanilite.com.au)





## Exit LED

e-Range

### Exit LED: e-Range product features

- 1 year warranty
- LED technology 75,000 hours lamp life
- High temperature NiCad batteries
- Large terminal block (16mm<sup>2</sup>) for easy wiring



### Exit slide connect

- Lithium iron phosphate battery
- 50,000 hours LEDs
- Universal wall/ceiling mounting, can also be rod or wire suspended
- One box solution - includes diffuser and pictograph for single/double sided installation

Description	Order code	Replacement of
Exit slide connect	ECOEXIT1BOX	EELED



### Exit wall mount

- Lithium iron phosphate battery
- 50,000 hours LEDs
- One box solution - includes diffuser and pictograph for single sided installation

Description	Order code	Replacement of
Exit wall mount	ECOEXITWALL	ECOLEDWM



### Exit ceiling mount

- Lithium iron phosphate battery
- 50,000 hours LEDs
- One box solution - includes diffuser and pictograph for single/double sided installation

Description	Order code	Replacement of
Exit ceiling mount	ECOEXITCEILING	ECOLEDCEM



### Exit base and diffusers

#### Base

- Lithium iron phosphate battery
- 50,000 hours LEDs

#### Diffusers

- Includes pictograph for single/double sided installation

Description	Order code	Replacement of
Exit base	ECOEXITBASE	ECOLED
Diffuser wall mounted	ECOEXITDIFWM	31-PEWM-AU
Diffuser ceiling mounted	ECOEXITDIFCM	31-PECMx





## Exit LED Quickfit®

s-Range

### Exit LED Quickfit®: s-Range product features

- 3 year warranty
- LED technology 100,000 hours lamp life
- High temperature NiCad batteries
- Quickfit® unique steel slide connect bracket for quick installation and easy maintenance
- 24m viewing distance

### Signature exit LED Quickfit



Order code	Description	Mounting
<b>Standard products</b>		Wall/ceiling
PQFLEDS	Quickfit LED exit 100K pictograph	
<b>Spare parts</b>		
03-YPMA001	Battery 3 cell NiCad 3.6V 1.6Ah	
PQFLEDS-LB	Quickfit LED exit 100K pictograph less bracket	
PQFLEDS-FR	Quickfit LED exit 100K frame only	
<b>Accessories</b>		
MQFCL	Cantilever bracket	
QFWGCM	Wire guard - ceiling	
QFWGWM	Wire guard - wall	
<b>Additional features</b>		
Includes all pictograph diffuser options for single or double sided installation		
Exit can also be suspended via jack chain, rod and lanyard (not supplied) if required		
Retrofit capability: fits into any existing Quickfit mounting bracket		

### Signature exit LED Quickfit theatre mask



Order code	Description	Mounting
<b>Standard products</b>		Wall/ceiling
PQFBLED-1	LED Quickfit theatre mask single sided picto exit	
PQFBLED-2	LED Quickfit theatre mask single sided <picto exit	
PQFBLED-3	LED Quickfit theatre mask single sided picto> exit	
PQFBLED-5	LED Quickfit theatre mask double sided picto exit	
PQFBLED-6	LED Quickfit theatre mask double sided picto AOW exit	
<b>Spare parts</b>		
03-01218	Battery 4 cell NiCad 4.8V 1.8Ah	
PQFBLED-FR	LED Quickfit theatre mask exit frame only	
<b>Additional features</b>		
Exit can also be suspended via jack chain, rod and lanyard (not supplied) if required		
Retrofit capability: fits into any existing Quickfit mounting bracket		



## Exit LED Quickfit®

s-Range | Nexus®



### Exit LED Quickfit Nexus®: s-Range product features

- 3 year warranty
- LED technology 100,000 hours lamp life
- High temperature NiCad batteries
- Quickfit® unique steel slide connect bracket for quick installation and easy maintenance
- 24m viewing distance
- Nexus® monitored, either cabled or wireless

#### Signature exit LED Quickfit Nexus®



Order code	Description	Mounting
<b>Nexus products</b>		Wall/ceiling
PQFNXSLED	LED Quickfit Nexus LX pictograph exit	
PQFNRFLD	LED Quickfit Nexus RF pictograph exit	
<b>Spare parts</b>		
03-01218	Battery 4 cell NiCad 4.8V 1.8Ah	
PQFNXSLED-LB	LED Quickfit Nexus LX pictograph exit less bracket	
PQFNRFLD-LB	LED Quickfit Nexus RF pictograph exit less bracket	
PQFNXSLED-FR	LED Quickfit Nexus LX exit frame only	
PQFNRFLD-FR	LED Quickfit Nexus RF exit frame only	
<b>Accessories</b>		
MQFCL	Cantilever bracket	
QFWGCM	Wire guard - ceiling	
QFWGWM	Wire guard - wall	
<b>Additional features</b>		
Includes all pictograph diffuser options for single or double sided installation		
Exit can also be suspended via jack chain, rod and lanyard (not supplied) if required		
Retrofit capability: fits into any existing Quickfit mounting bracket		

#### Signature exit LED Quickfit theatre mask Nexus®



Order code	Description	Mounting
<b>Nexus products</b>		Wall/ceiling
PQFBNXSLED-1	LED Quickfit Nexus LX theatre mask single sided picto exit	
PQFBNXSLED-2	LED Quickfit Nexus LX theatre mask single sided <picto exit	
PQFBNXSLED-3	LED Quickfit Nexus LX theatre mask single sided picto> exit	
PQFBNXSLED-5	LED Quickfit Nexus LX theatre mask double sided picto exit	
PQFBNXSLED-6	LED Quickfit Nexus LX theatre mask double sided picto AOW exit	
PQFBNRFLED-1	LED Quickfit Nexus RF theatre mask single sided picto exit	
PQFBNRFLED-2	LED Quickfit Nexus RF theatre mask single sided <picto exit	
PQFBNRFLED-3	LED Quickfit Nexus RF theatre mask single sided picto> exit	
PQFBNRFLED-5	LED Quickfit Nexus RF theatre mask double sided picto exit	
PQFBNRFLED-6	LED Quickfit Nexus RF theatre mask double sided picto AOW exit	
<b>Spare parts</b>		
03-01218	Battery 4 cell NiCad 4.8V 1.8Ah	
PQFBNXSLED-FR	LED Quickfit Nexus LX theatre mask exit frame only	
PQFBNRFLED-FR	LED Quickfit Nexus RF theatre mask exit frame only	
<b>Additional features</b>		
Exit can also be suspended via jack chain, rod and lanyard (not supplied) if required		
Retrofit capability: fits into any existing Quickfit mounting bracket		



## Exit LED Quickfit®

s-Range

### Exit LED Quickfit®: s-Range product features

- 3 year warranty
- LED technology 100,000 hours lamp life
- High temperature NiCad batteries
- Quickfit® unique steel slide connect bracket for quick installation and easy maintenance
- 24m viewing distance

### Signature exit LED Quickfit weatherproof



Order code	Description	Mounting
<b>Standard products</b>		Wall/ceiling
PWQFLEDP-1	LED Quickfit weatherproof SS polycarbonate picto exit	<b>IP rating</b> IP65
PWQFLEDP-2	LED Quickfit weatherproof SS polycarbonate <picto exit	
PWQFLEDP-3	LED Quickfit weatherproof SS polycarbonate picto> exit	
PWQFLEDP-5	LED Quickfit weatherproof DS polycarbonate picto exit	
PWQFLEDP-6	LED Quickfit weatherproof DS polycarbonate picto AOW exit	
PWQFLEDA-1	LED Quickfit weatherproof SS acrylic picto exit	
PWQFLEDA-2	LED Quickfit weatherproof SS acrylic <picto exit	
PWQFLEDA-3	LED Quickfit weatherproof SS acrylic picto> exit	
PWQFLEDA-5	LED Quickfit weatherproof DS acrylic picto exit	
PWQFLEDA-6	LED Quickfit weatherproof DS acrylic picto AOW exit	
<b>Spare parts</b>		
03-01218	Battery 4 cell NiCad 4.8V 1.8Ah	
PQFBLED-FR	LED Quickfit theatre mask exit frame only	
<b>Accessories</b>		
WQFCLH	Cantilever mounting bracket - heavy duty	
WQFCLL	Cantilever mounting bracket - light duty	
WQFWM	Wall mount bracket	
02-WQFEA	Weatherproof Quickfit acrylic diffuser	
02-WQFEP	Weatherproof Quickfit polycarbonate diffuser	
<b>Additional features</b>		
UV stabilised vandal resistant polycarbonate cover or high impact chemical resistant acrylic cover option		

### Signature exit LED Quickfit® vandal resistant



Order code	Description	Mounting
Standard products		Wall/ceiling
VPQLED	LED Quickfit vandal resistant pictograph exit	Impact rating IK09
Spare parts		
03-01218	Battery 4 cell NiCad 4.8V 1.8Ah	
PQFLED-FR	LED Quickfit exit frame only	
Additional features		
Vermin resistance. Strong steel body and end cap. Anti-tamper cover screws.		
Includes all pictograph diffuser options for single or double sided installation.		

## Exit LED Quickfit®

s-Range | Nexus®



## Exit LED Quickfit Nexus®: s-Range product features

- 3 year warranty
- LED technology 100,000 hours lamp life
- High temperature NiCad batteries
- Quickfit® unique steel slide connect bracket for quick installation and easy maintenance
- 24m viewing distance
- Nexus® monitored, either cabled or wireless

## Signature exit LED Quickfit weatherproof Nexus®



Order code	Description	Mounting
<b>Nexus products</b>		Wall/ceiling
PWQFNXSLEDP-1	LED Quickfit weatherproof Nexus LX SS polycarbonate picto exit	IP rating IP65
PWQFNXSLEDP-2	LED Quickfit weatherproof Nexus LX SS polycarbonate <picto exit	
PWQFNXSLEDP-3	LED Quickfit weatherproof Nexus LX SS polycarbonate picto> exit	IP rating IP65
PWQFNXSLEDP-5	LED Quickfit weatherproof Nexus LX DS polycarbonate picto exit	
PWQFNXSLEDP-6	LED Quickfit weatherproof Nexus LX DS polycarbonate picto AOW exit	IP rating IP65
PWQFNXSLEDA-1	LED Quickfit weatherproof Nexus LX SS acrylic picto exit	
PWQFNXSLEDA-2	LED Quickfit weatherproof Nexus LX SS acrylic <picto exit	IP rating IP65
PWQFNXSLEDA-3	LED Quickfit weatherproof Nexus LX SS acrylic picto> exit	
PWQFNXSLEDA-5	LED Quickfit weatherproof Nexus LX DS acrylic picto exit	IP rating IP65
PWQFNXSLEDA-6	LED Quickfit weatherproof Nexus LX DS acrylic picto AOW exit	
PWQFNRFLEDP-1	LED Quickfit weatherproof Nexus RF SS polycarbonate picto exit	IP rating IP65
PWQFNRFLEDP-2	LED Quickfit weatherproof Nexus RF SS polycarbonate <picto exit	
PWQFNRFLEDP-3	LED Quickfit weatherproof Nexus RF SS polycarbonate picto> exit	IP rating IP65
PWQFNRFLEDP-5	LED Quickfit weatherproof Nexus RF DS polycarbonate picto exit	
PWQFNRFLEDP-6	LED Quickfit weatherproof Nexus RF DS polycarbonate picto AOW exit	IP rating IP65
PWQFNRFLEDA-1	LED Quickfit weatherproof Nexus RF SS acrylic picto exit	
PWQFNRFLEDA-2	LED Quickfit weatherproof Nexus RF SS acrylic <picto exit	IP rating IP65
PWQFNRFLEDA-3	LED Quickfit weatherproof Nexus RF SS acrylic picto> exit	
PWQFNRFLEDA-5	LED Quickfit weatherproof Nexus RF DS acrylic picto exit	IP rating IP65
PWQFNRFLEDA-6	LED Quickfit weatherproof Nexus RF DS acrylic picto AOW exit	
<b>Spare parts</b>		
03-01218	Battery 4 cell NiCad 4.8V 1.8Ah	
PQFBNXSLED-FR	LED Quickfit Nexus LX theatre mask exit frame only	
PQFBNRFLED-FR	LED Quickfit Nexus RF theatre mask exit frame only	
<b>Accessories</b>		
WQFCLH	Cantilever mounting bracket - heavy duty	
WQFCLL	Cantilever mounting bracket - light duty	
WQFWM	Wall mount bracket	
02-WQFEA	Weatherproof Quickfit acrylic diffuser	
02-WQFEP	Weatherproof Quickfit polycarbonate diffuser	
<b>Additional features</b>		
UV stabilised vandal resistant polycarbonate cover or high impact chemical resistant acrylic cover option		

## Signature exit LED Quickfit® vandal resistant Nexus®



Order code	Description	Mounting
<b>Nexus products</b>		Wall/ceiling
VPQNXSLED	LED Quickfit vandal resistant Nexus LX pictograph exit	Impact rating IK09
VPQNRFLLED	LED Quickfit vandal resistant Nexus RF pictograph exit	
<b>Spare parts</b>		
03-01218	Battery 4 cell NiCad 4.8V 1.8Ah	
PQFBNXSLED-FR	LED Quickfit Nexus LX exit frame only	
PQFBNRFLED-FR	LED Quickfit Nexus RF exit frame only	
<b>Additional features</b>		
Vermin resistance. Strong steel body and end cap. Anti-tamper cover screws.		
Includes all pictograph diffuser options for single or double sided installation.		





## Exit LED edgelit

s-Range

### Exit LED edgelit: s-Range product features

- 3 year warranty
- LED technology 100,000 hours lamp life
- High temperature NiMH batteries
- Includes all pictograph diffuser options
- 24m viewing distance

### Signature exit LED edgelit Quickfit®



Order code	Description	Mounting
<b>Standard products</b>		Wall/ceiling
PLQLED	LED legend Quickfit pictograph exit	
<b>Spare parts</b>		
03-01213P	Battery 4 cell NiMH 4.8V 1.25Ah	
PLQLED-LB	LED Quickfit less bracket	
<b>Additional features</b>		
Quickfit® unique steel slide connect bracket for quick installation and easy maintenance		
Exit can also be suspended via jack chain, rod and lanyard (not supplied) if required		
Retrofit capability: fits into any existing Quickfit mounting bracket		

### Signature exit LED edgelit surface mount



Order code	Description	Mounting
<b>Standard products</b>		Surface
PLSLED	LED legend surface mount pictograph edgelight	
<b>Spare parts</b>		
03-01213P	Battery 4 cell NiMH 4.8V 1.25Ah	
<b>Accessories</b>		
PLSLEDCLKIT	Cantilever mounting kit	
PLSLEDWMKIT	Wall mounting kit	
<b>Additional features</b>		
One-box solution, overall light weight and snap n' clip mechanism allows for quick and easy installation		
Suitable for ceilings where a recessed fitting is not feasible		
Suspended, wall and cantilever mounting kit options available		

## Exit LED edgelit

s-Range | Nexus®



### Exit LED edgelit Nexus®: s-Range product features

- 3 year warranty
- LED technology 100,000 hours lamp life
- High temperature NiMH batteries
- Includes all pictograph diffuser options
- 24m viewing distance
- Nexus® monitored, either cabled or wireless

#### Signature exit LED edgelit Quickfit® Nexus®



Order code	Description	Mounting
<b>Nexus products</b>		Wall/ceiling
PLQNXSLED	LED legend Quickfit Nexus LX pictograph exit	
PLQNRFLLED	LED legend Quickfit Nexus RF pictograph exit	
<b>Spare parts</b>		
03-01213P	Battery 4 cell NiMH 4.8V 1.25Ah	
PLQNXSLED-LB	LED Quickfit Nexus LX less bracket	
PLQNRFLLED-LB	LED Quickfit Nexus RF less bracket	
<b>Additional features</b>		
Quickfit® unique steel slide connect bracket for quick installation and easy maintenance		
Exit can also be suspended via jack chain, rod and lanyard (not supplied) if required		
Retrofit capability: fits into any existing Quickfit mounting bracket		

#### Signature exit LED edgelit surface mount Nexus®



Order code	Description	Mounting
<b>Nexus products</b>		Surface
PLSNXSLED	LED legend surface mount Nexus LX pictograph edgelight	
PLSNRFLLED	LED legend surface mount Nexus RF pictograph edgelight	
<b>Spare parts</b>		
03-01213P	Battery 4 cell NiMH 4.8V 1.25Ah	
<b>Accessories</b>		
PLSLEDCLKIT	Cantilever mounting kit	
PLSLEDWMKIT	Wall mounting kit	
<b>Additional features</b>		
One-box solution, overall light weight and snap n' clip mechanism allows for quick and easy installation		
Suitable for ceilings where a recessed fitting is not feasible		
Suspended, wall and cantilever mounting kit options available		




## Exit LED edgelit

s-Range


### Exit LED edgelit: s-Range product features

- 3 year warranty
- LED technology 100,000 hours lamp life
- High temperature NiMH batteries
- 2m flex and plug included
- 24m viewing distance

### Signature exit LED edgelit recessed

	Order code	Description	Mounting
	Standard products		Recessed ceiling
	PLRLED	LED legend recessed pictograph edgelit	
	Spare parts		
	03-01213P	Battery 4 cell NiMH 4.8V 1.25Ah	
	PLRLEDADAPTOR	LED legend recessed diffuser	
Additional features			
One-box solution, overall light weight and snap n' clip mechanism allows for quick and easy installation			
Suits ceiling thickness 1mm-19mm			
Includes all pictograph diffuser options			

### Signature exit LED edgelit recessed, original style square diffuser

	Order code	Description	Mounting
	Standard products		Surface ceiling
	PLROLED	LED legend recessed pictograph exit, original style square diffuser	
	Spare parts		
	03-01213P	Battery 4 cell NiMH 4.8V 1.25Ah	
Accessories			
	31-PL1	Diffuser single sided picto	
	31-PL2	Diffuser single sided <picto	
	31-PL3	Diffuser single sided picto>	
	31-PL5	Diffuser double sided picto	
	31-PL6	Diffuser double sided picto AOW	
Additional features			
All pictograph diffuser options available (order separately)			



Please note that the diffuser needs to be ordered separately.



## Exit LED edgelit


s-Range | Nexus®




### Exit LED edgelit Nexus®: s-Range product features


- 3 year warranty
- LED technology 100,000 hours lamp life
- High temperature NiMH batteries
- 2m flex and plug included
- 24m viewing distance
- Nexus® monitored, either cabled or wireless

#### Signature exit LED edgelit recessed Nexus®

	Order code	Description	Mounting
	<b>Nexus products</b>		Recessed ceiling
	PLRNXSLED	LED legend recessed Nexus LX pictograph edgelight	
	PLRNRLED	LED legend recessed Nexus RF pictograph edgelight	
	<b>Spare parts</b>		
	03-01213P	Battery 4 cell NiMH 4.8V 1.25Ah	
	PLRLEDADAPTOR	LED legend recessed diffuser	
	<b>Additional features</b>		
	One-box solution, overall light weight and snap n' clip mechanism allows for quick and easy installation		
	Suits ceiling thickness 1mm-19mm		
	Includes all pictograph diffuser options		

#### Signature exit LED edgelit recessed Nexus®, original style square diffuser

	Order code	Description	Mounting
	<b>Nexus products</b>		Surface ceiling
	PLRONXSLED	LED legend recessed Nexus LX pictograph exit, original style square diffuser	
	PLRONRLED	LED legend recessed Nexus RF pictograph exit, original style square diffuser	
	<b>Spare parts</b>		
	03-01213P	Battery 4 cell NiMH 4.8V 1.25Ah	
	<b>Accessories</b>		
	31-PL1	Diffuser single sided picto	
	31-PL2	Diffuser single sided <picto	
	31-PL3	Diffuser single sided picto>	
	31-PL5	Diffuser double sided picto	
	31-PL6	Diffuser double sided picto AOW	
	<b>Additional features</b>		
	All pictograph diffuser options available (order separately)		

 Please note that the diffuser needs to be ordered separately.



## Exit LED Quickfit®

p-Range

### Exit LED Quickfit®: p-Range product features

- 5 year warranty
- LED technology 100,000 hours plus lamp life
- Lithium iron phosphate battery
- Quickfit® unique steel slide connect bracket for quick installation and easy maintenance
- 24m viewing distance

### Platinum exit LED Quickfit



Order code	Description	Mounting
<b>Standard products</b>		Wall/ceiling
PQFLEDP	LED platinum Quickfit pictograph exit	
<b>Spare parts</b>		
03-01302P	Battery LiFePO4 3.2V 3.2Ah	
PQFLEDP-LB	LED platinum Quickfit pictograph exit less bracket	
PQFLEDP-FR	LED platinum Quickfit exit frame only	
<b>Additional features</b>		
Includes all pictograph diffuser options for single or double sided installation		
Exit can also be suspended via jack chain, rod and lanyard (not supplied) if required		
Retrofit capability: fits into any existing Quickfit mounting bracket		

### Platinum exit LED Quickfit theatre mask



Order code	Description	Mounting
<b>Standard products</b>		Wall/ceiling
PQFBLEDP-1	LED platinum Quickfit theatre mask single sided picto exit	
PQFBLEDP-2	LED platinum Quickfit theatre mask single sided <picto exit	
PQFBLEDP-3	LED platinum Quickfit theatre mask single sided picto> exit	
PQFBLEDP-5	LED platinum Quickfit theatre mask double sided picto exit	
PQFBLEDP-6	LED platinum Quickfit theatre mask double sided picto AOW exit	
PQFBLEDP-FR	LED platinum Quickfit theatre mask exit frame only	
<b>Spare parts</b>		
03-01302P	Battery LiFePO4 3.2V 3.2Ah	
<b>Additional features</b>		
Exit can also be suspended via jack chain, rod and lanyard (not supplied) if required		
Retrofit capability: fits into any existing Quickfit mounting bracket		

### Accessories

Order code	
MQFCL	Cantilever bracket
QFWGCM	Wire guard - ceiling
QFWGWM	Wire guard - wall

STOCK INDENT

## Exit LED Quickfit®

p-Range | Nexus®



### Exit LED Quickfit Nexus®: p-Range product features

- 5 year warranty
- LED technology 100,000 hours plus lamp life
- Lithium iron phosphate battery
- Quickfit® unique steel slide connect bracket for quick installation and easy maintenance
- 24m viewing distance
- Nexus® monitored, either cabled or wireless

#### Platinum exit LED Quickfit Nexus®



Order code	Description	Mounting
<b>Nexus products</b>		Wall/ceiling
PQFNXSLEDP	LED platinum Quickfit Nexus LX pictograph exit	
PQFNRFLEDP	LED platinum Quickfit Nexus RF pictograph exit	
<b>Spare parts</b>		
03-01302P	Battery LiFePO4 3.2V 3.2Ah	
PQFNXSLEDP-LB	LED platinum Quickfit Nexus LX pictograph exit less bracket	
PQFNRFLEDP-LB	LED platinum Quickfit Nexus RF pictograph exit less bracket	
PQFNXSLEDP-FR	LED platinum Quickfit Nexus LX exit frame only	
PQFNRFLEDP-FR	LED platinum Quickfit Nexus RF exit frame only	
<b>Additional features</b>		
Includes all pictograph diffuser options for single or double sided installation		
Exit can also be suspended via jack chain, rod and lanyard (not supplied) if required		
Retrofit capability: fits into any existing Quickfit mounting bracket		

#### Platinum exit LED Quickfit theatre mask Nexus®



Order code	Description	Mounting
<b>Nexus products</b>		Wall/ceiling
PQFBNXSLEDP-1	LED platinum Quickfit Nexus LX theatre mask single sided picto exit	
PQFBNXSLEDP-2	LED platinum Quickfit Nexus LX theatre mask single sided <picto exit	
PQFBNXSLEDP-3	LED platinum Quickfit Nexus LX theatre mask single sided picto> exit	
PQFBNXSLEDP-5	LED platinum Quickfit Nexus LX theatre mask double sided picto exit	
PQFBNXSLEDP-6	LED platinum Quickfit Nexus LX theatre mask double sided picto AOW exit	
PQFBNRFLEDP-1	LED platinum Quickfit Nexus RF theatre mask single sided picto exit	
PQFBNRFLEDP-2	LED platinum Quickfit Nexus RF theatre mask single sided <picto exit	
PQFBNRFLEDP-3	LED platinum Quickfit Nexus RF theatre mask single sided picto> exit	
PQFBNRFLEDP-5	LED platinum Quickfit Nexus RF theatre mask double sided picto exit	
PQFBNRFLEDP-6	LED platinum Quickfit Nexus RF theatre mask double sided picto AOW exit	
<b>Spare parts</b>		
03-01302P	Battery LiFePO4 3.2V 3.2Ah	
PQFBNXSLEDP-FR	LED platinum Quickfit Nexus LX theatre exit frame only	
PQFBNRFLEDP-FR	LED platinum Quickfit Nexus RF theatre exit frame only	
<b>Additional features</b>		
Exit can also be suspended via jack chain, rod and lanyard (not supplied) if required		
Retrofit capability: fits into any existing Quickfit mounting bracket		

#### Accessories

Order code	
MQFCL	Canilever bracket
QFWGCM	Wire guard - ceiling
QFWGWM	Wire guard - wall






Exit LED Quickfit®  
p-Range



Exit LED Quickfit®: p-Range product features

- 5 year warranty
- LED technology 100,000 hours plus lamp life
- Lithium iron phosphate battery
- Unique internal steel slide connect bracket for quick installation and easy maintenance
- 24m viewing distance

Platinum exit LED Quickfit vandal resistant

	Order code	Description	Mounting
	<b>Standard products</b>	LED platinum Quickfit vandal resistant pictograph exit	Wall/ceiling
	VPQLEDP		
	<b>Spare parts</b>		<b>Impact rating</b>
	03-01302P	Battery LiFePO4 3.2V 3.2Ah	IK09
	PQFLEDP-FR	LED platinum Quickfit exit frame only	
<b>Additional features</b>			
Vermin resistance. Strong steel body and end cap. Anti-tamper cover screws.			
Includes all pictograph diffuser options for single or double sided installation.			

## Exit LED Quickfit®


p-Range | Nexus®



### Exit LED Quickfit Nexus®: p-Range product features

- 5 year warranty
- LED technology 100,000 hours plus lamp life
- Lithium iron phosphate battery
- Unique internal steel slide connect bracket for quick installation and easy maintenance
- 24m viewing distance
- Nexus® monitored, either cabled or wireless

### Platinum exit LED Quickfit® vandal resistant Nexus®

	Order code	Description	Mounting
	Nexus products		Wall/ceiling
	VPQNXSLEDP	LED platinum Quickfit vandal resistant Nexus LX pictograph exit	
	VPQNRFLEDP	LED platinum Quickfit vandal resistant Nexus RF pictograph exit	
	Spare parts		Impact rating
	03-01302P	Battery LiFePO4 3.2V 3.2Ah	IK09
	PQFNXSLEDP-FR	LED platinum Quickfit Nexus LX exit frame only	
	PQFNRFLEDP-FR	LED platinum Quickfit Nexus RF exit frame only	
Additional features			
Vermin resistance. Strong steel body and end cap. Anti-tamper cover screws.			
Includes all pictograph diffuser options for single or double sided installation.			



## Exit jumbo LED

p-Range

### Exit jumbo LED: p-Range product features

- 5 year warranty
- LED technology 100,000 hours plus lamp life
- Advance charging technology combined with Lithium iron phosphate battery for long life and low maintenance
- 40m viewing distance
- 36m viewing distance for weatherproof exit

### Platinum exit jumbo LED



Order code	Description	Mounting
<b>Standard products</b>		Wall/ceiling
PEJLEMWM-1	Platinum exit jumbo LED emergency wall mount single sided picto	
PEJLEMWM-2	Platinum exit jumbo LED emergency wall mount single sided <picto	
PEJLEMWM-3	Platinum exit jumbo LED emergency wall mount single sided picto>	
PEJLEMCM-1	Platinum exit jumbo LED emergency ceiling mount single sided picto	
PEJLEMCM-2	Platinum exit jumbo LED emergency ceiling mount single sided <picto	
PEJLEMCM-3	Platinum exit jumbo LED emergency ceiling mount single sided picto>	
PEJLEMCM-5	Platinum exit jumbo LED emergency ceiling mount double sided picto	
PEJLEMCM-6	Platinum exit jumbo LED emergency ceiling mount double sided picto AOW	
<b>Spare parts</b>		
03-01307P	Battery LiFePO4 6.4V 3.2Ah	
<b>Additional features</b>		
Exit can also be suspended via jack chain, rod and lanyard (not supplied) if required		
Large terminal block (16mm <sup>2</sup> ) for easy wiring		
Available in all pictograph diffuser options		

### Platinum exit jumbo LED weatherproof



Order code	Description	Mounting
<b>Standard products</b>		Surface
PEJLWEM-1	Platinum exit jumbo LED weatherproof emergency picto	
PEJLWEM-2	Platinum exit jumbo LED weatherproof emergency <picto	<b>IP rating</b>
PEJLWEM-3	Platinum exit jumbo LED weatherproof emergency picto>	IP65
<b>Spare parts</b>		
03-01307P	Battery LiFePO4 6.4V 3.2Ah	
<b>Additional features</b>		
UV stabilised vandal resistant (IK08) polycarbonate cover		
Removable gear tray for easy installation and maintenance		

## Exit jumbo LED

p-Range | Nexus®



### Exit jumbo LED Nexus®: p-Range product features

- 5 year warranty
- LED technology 100,000 hours plus lamp life
- Advance charging technology combined with Lithium iron phosphate battery for long life and low maintenance
- 40m viewing distance
- 36m viewing distance for weatherproof exit
- Nexus® monitored, either cabled or wireless

### Platinum exit jumbo LED Nexus®



Order code	Description	Mounting
<b>Nexus products</b>		Wall/ceiling
PEJLLXWM-1	Platinum exit jumbo LED Nexus LX wall mount single sided picto	
PEJLLXWM-2	Platinum exit jumbo LED Nexus LX wall mount single sided <picto	
PEJLLXWM-3	Platinum exit jumbo LED Nexus LX wall mount single sided picto>	
PEJLLXCM-1	Platinum exit jumbo LED Nexus LX ceiling mount single sided picto	
PEJLLXCM-2	Platinum exit jumbo LED Nexus LX ceiling mount single sided <picto	
PEJLLXCM-3	Platinum exit jumbo LED Nexus LX ceiling mount single sided picto>	
PEJLLXCM-5	Platinum exit jumbo LED Nexus LX ceiling mount double sided picto	
PEJLLXCM-6	Platinum exit jumbo LED Nexus LX ceiling mount double sided picto AOW	
PEJLRFWM-1	Platinum exit jumbo LED Nexus RF wall mount single sided picto	
PEJLRFWM-2	Platinum exit jumbo LED Nexus RF wall mount single sided <picto	
PEJLRFWM-3	Platinum exit jumbo LED Nexus RF wall mount single sided picto>	
PEJLRFCM-1	Platinum exit jumbo LED Nexus RF ceiling mount single sided picto	
PEJLRFCM-2	Platinum exit jumbo LED Nexus RF ceiling mount single sided <picto	
PEJLRFCM-3	Platinum exit jumbo LED Nexus RF ceiling mount single sided picto>	
PEJLRFCM-5	Platinum exit jumbo LED Nexus RF ceiling mount double sided picto	
PEJLRFCM-6	Platinum exit jumbo LED Nexus RF ceiling mount double sided picto AOW	
<b>Spare parts</b>		
03-01307P	Battery LiFePO4 6.4V 3.2Ah	
<b>Additional features</b>		
Exit can also be suspended via jack chain, rod and lanyard (not supplied) if required		
Large terminal block (16mm <sup>2</sup> ) for easy wiring		
Available in all pictograph diffuser options		

### Platinum exit jumbo LED weatherproof



Order code	Description	Mounting
<b>Nexus products</b>		Surface
PEJLWLX-1	Platinum exit jumbo LED weatherproof Nexus LX picto	
PEJLWLX-2	Platinum exit jumbo LED weatherproof Nexus LX <picto	
PEJLWLX-3	Platinum exit jumbo LED weatherproof Nexus LX picto>	
PEJLWRF-1	Platinum exit jumbo LED weatherproof Nexus RF picto	
PEJLWRF-2	Platinum exit jumbo LED weatherproof Nexus RF <picto	
PEJLWRF-3	Platinum exit jumbo LED weatherproof Nexus RF picto>	
<b>Spare parts</b>		
03-01307P	Battery LiFePO4 6.4V 3.2Ah	
<b>Additional features</b>		
UV stabilised vandal resistant (IK08) polycarbonate cover		
Removable gear tray for easy installation and maintenance		






Exit LED weatherproof  
p-Range



- Exit LED weatherproof: p-Range product features**
- 5 year warranty
  - LED technology 100,000 hours plus lamp life
  - Lithium iron phosphate battery
  - IP65 weatherproof enclosure
  - 24m viewing distance

**Platinum exit LED weatherproof**


	Order code	Description	Mounting
	Standard products		Surface
	PWEXLEDP-1	LED platinum weatherproof picto exit	IP rating IP65
	PWEXLEDP-2	LED platinum weatherproof <picto exit	
	PWEXLEDP-3	LED platinum weatherproof picto> exit	
	Spare parts		
	03-01301P	Battery LiFePO4 3.2V 3.2Ah	
Additional features			
UV stabilised vandal resistant (IK08) polycarbonate cover			
Removable gear tray for easy installation and maintenance			

Exit LED weatherproof  
p-Range | Nexus®



- Exit LED weatherproof Nexus®: p-Range product features**
- 5 year warranty
  - LED technology 100,000 hours plus lamp life
  - Lithium iron phosphate battery
  - IP65 weatherproof enclosure
  - 24m viewing distance
  - Nexus® monitored, either cabled or wireless

**Platinum exit LED weatherproof Nexus®**

	Order code	Description	Mounting
	<b>Nexus products</b>		Surface
	PWEXNXSLEDP-1	LED platinum weatherproof Nexus LX picto exit	<b>IP rating</b> IP65
	PWEXNXSLEDP-2	LED platinum weatherproof Nexus LX <picto exit	
	PWEXNXSLEDP-3	LED platinum weatherproof Nexus LX picto> exit	
	PWEXNRFLEDP-1	LED platinum weatherproof Nexus RF picto exit	
	PWEXNRFLEDP-2	LED platinum weatherproof Nexus RF <picto exit	
	PWEXNRFLEDP-3	LED platinum weatherproof Nexus RF picto> exit	
	<b>Spare parts</b>		
	03-01301P	Battery LiFePO4 3.2V 3.2Ah	
<b>Additional features</b>			
UV stabilised vandal resistant (IK08) polycarbonate cover			
Removable gear tray for easy installation and maintenance			



## Exit LED edgelit

p-Range

### Exit LED edgelit: p-Range product features

- 5 year warranty
- LED technology 100,000 hours plus lamp life
- Lithium iron phosphate battery
- Includes all pictograph diffuser options
- 24m viewing distance

### Platinum exit LED edgelit Quickfit®



Order code	Description	Mounting
<b>Standard products</b>		Wall/ceiling
PLQLEDP	LED platinum legend Quickfit pictograph exit	
<b>Spare parts</b>		
03-01305P	Battery LiFePO4 3.2V 1.5Ah	
<b>Additional features</b>		
Quickfit® unique steel slide connect bracket for quick installation and easy maintenance		
Exit can also be suspended via jack chain, rod and lanyard (not supplied) if required		
Retrofit capability: fits into any existing Quickfit mounting bracket		

### Platinum exit LED edgelit surface mount



Order code	Description	Mounting
<b>Standard products</b>		Surface
PLSLEDP	LED platinum legend surface mount pictograph edgelight	
<b>Spare parts</b>		
03-01304P	Battery LiFePO4 3.2V 1.5Ah	
<b>Accessories</b>		
PLSLEDCLKIT	Cantilever mounting kit	
PLSLEDWMKIT	Wall mounting kit	
<b>Additional features</b>		
One-box solution, overall light weight and snap n' clip mechanism allows for quick and easy installation		
Suitable for ceilings where a recessed fitting is not feasible		
Wall and cantilever mounting kit options available		

## Exit LED edgelit

p-Range | Nexus®



### Exit LED edgelit Nexus®: p-Range product features

- 5 year warranty
- LED technology 100,000 hours plus lamp life
- Lithium iron phosphate battery
- Includes all pictograph diffuser options
- 24m viewing distance
- Nexus® monitored, either cabled or wireless

#### Platinum exit LED edgelit Quickfit® Nexus®



Order code	Description	Mounting
<b>Nexus products</b>		Wall/ceiling
PLQNXSLEDP	LED platinum legend Quickfit Nexus LX pictograph exit	
PLQNRFLEDP	LED platinum legend Quickfit Nexus RF pictograph exit	
<b>Spare parts</b>		
03-01305P	Battery LiFePO4 3.2V 1.5Ah	
<b>Additional features</b>		
Quickfit® unique steel slide connect bracket for quick installation and easy maintenance		
Exit can also be suspended via jack chain, rod and lanyard (not supplied) if required		
Retrofit capability: fits into any existing Quickfit mounting bracket		

#### Platinum exit LED edgelit surface mount Nexus®



Order code	Description	Mounting
<b>Nexus products</b>		Surface
PLSNXSLEDP	LED platinum legend surface mount Nexus LX pictograph edgelight	
PLSNRFLEDP	LED platinum legend surface mount Nexus RF pictograph edgelight	
<b>Spare parts</b>		
03-01304P	Battery LiFePO4 3.2V 1.5Ah	
<b>Accessories</b>		
PLSLEDCLKIT	Cantilever mounting kit	
PLSLEDWMKIT	Wall mounting kit	
<b>Additional features</b>		
One-box solution, overall light weight and snap n' clip mechanism allows for quick and easy installation		
Suitable for ceilings where a recessed fitting is not feasible		
Wall and cantilever mounting kit options available		






## Exit LED edgelit

p-Range

### Exit LED edgelit: p-Range product features


- 5 year warranty
- LED technology 100,000 hours plus lamp life
- Lithium iron phosphate battery
- 2m flex and plug included
- 24m viewing distance

### Platinum exit LED edgelit recessed




Order code	Description	Mounting
Standard products		Recessed ceiling
PLRLEDP	LED platinum legend recessed pictograph edgelight	
Spare parts		
03-01304P	Battery LiFePO4 3.2V 1.5Ah	
Accessories		
PLRLEDADAPTOR	Cover plate for retrofitting	
Additional features		
One-box solution, overall light weight and snap n' clip mechanism allows for quick and easy installation		
Suits ceiling thickness 1mm-19mm		
Includes all pictograph diffuser options		

### Platinum exit LED edgelit recessed, original style square diffuser



Order code	Description	Mounting
Standard products		
PLROLEDP	LED platinum legend recessed pictograph exit, original style square diffuser	Surface ceiling
Spare parts		
03-01304P	Battery LiFePO4 3.2V 1.5Ah	
Accessories		
31-PL1	Diffuser single sided picto	
31-PL2	Diffuser single sided <picto	
31-PL3	Diffuser single sided picto>	
31-PL5	Diffuser double sided picto	
31-PL6	Diffuser double sided picto AOW	
Additional features		
All pictograph diffuser options available (order separately)		



Please note that the diffuser needs to be ordered separately.



Please note that the diffuser needs to be ordered separately.

## Exit LED edgelit

p-Range | Nexus®



### Exit LED edgelit Nexus®: p-Range product features

- 5 year warranty
- LED technology 100,000 hours plus lamp life
- Lithium iron phosphate battery
- 2m flex and plug included
- 24m viewing distance
- Nexus® monitored, either cabled or wireless

### Platinum exit LED edgelit recessed Nexus®



Order code	Description	Mounting
<b>Nexus products</b>		Recessed ceiling
PLRNXSLEDP	LED platinum legend recessed Nexus LX pictograph edgelight	
PLRNRFLEDP	LED platinum legend recessed Nexus RF pictograph edgelight	
<b>Spare parts</b>		
03-01304P	Cover plate for retrofitting	
<b>Accessories</b>		
PLRLEDADAPTOR	Cover plate for retrofitting	
<b>Additional features</b>		
One-box solution, overall light weight and snap n' clip mechanism allows for quick and easy installation		
Suits ceiling thickness 1mm-19mm		
Includes all pictograph diffuser options		

### Platinum exit LED edgelit recessed Nexus®, original style square diffuser



Order code	Description	Mounting
<b>Nexus products</b>		Surface ceiling
PLRONXSLEDP	LED platinum legend recessed Nexus LX pictograph exit, original style square diffuser	
PLRONRFLEDP	LED platinum legend recessed Nexus RF pictograph exit, original style square diffuser	
<b>Spare parts</b>		
03-01304P	Battery LiFePO4 3.2V 1.5Ah	
<b>Accessories</b>		
31-PL1	Diffuser single sided picto	
31-PL2	Diffuser single sided <picto	
31-PL3	Diffuser single sided picto>	
31-PL5	Diffuser double sided picto	
31-PL6	Diffuser double sided picto AOW	
<b>Additional features</b>		
All pictograph diffuser options available (order separately)		



Please note that the diffuser needs to be ordered separately.



## Exit LED evago

p-Range

### Exit LED evago: p-Range product features

- 5 year warranty
- LED technology 100,000 hours plus lamp life
- Lithium iron phosphate battery
- 24m viewing distance
- 0.5m and 1m rod suspension kit available as a standard option
- 1.5m and 3m wire suspension kit available as a standard option

### Platinum exit LED evago ceiling mount



Order code	Description	Mounting
<b>Standard products</b>		Ceiling mount
PELEVEMSCM-1	Platinum exit LED evago ceiling mount single sided picto	
PELEVEMSCM-2	Platinum exit LED evago ceiling mount single sided <picto	
PELEVEMSCM-3	Platinum exit LED evago ceiling mount single sided picto>	
PELEVEMSCM-5	Platinum exit LED evago ceiling mount double sided picto	
PELEVEMSCM-6	Platinum exit LED evago ceiling mount double sided picto AOW	
<b>Spare parts</b>		
03-YPMA011	Battery LiFePO4 3.2V 1.14Ah	
<b>Additional features</b>		
Architecturally pleasing frameless slim line design		
First-fix plate for quick and easy installation and maintenance		


### Platinum exit LED evago theatre mask ceiling mount



Order code	Description	Mounting
<b>Standard products</b>		Ceiling mount
PELEVBEMSCM-1	Platinum exit LED evago theatre mask ceiling mount single sided picto	
PELEVBEMSCM-2	Platinum exit LED evago theatre mask ceiling mount single sided <picto	
PELEVBEMSCM-3	Platinum exit LED evago theatre mask ceiling mount single sided picto>	
PELEVBEMSCM-5	Platinum exit LED evago theatre mask ceiling mount double sided picto	
PELEVBEMSCM-6	Platinum exit LED evago theatre mask ceiling mount double sided picto AOW	
<b>Spare parts</b>		
03-YPMA011	Battery LiFePO4 3.2V 1.14Ah	
<b>Additional features</b>		
Architecturally pleasing frameless slim line design		
First-fix plate for quick and easy installation and maintenance		

### Accessories

Order code	
EVRSK50CM	Evago rod suspension kit 50cm
EVRSK100CM	Evago rod suspension kit 100cm
EVWSK150CM	Evago wire suspension kit 150cm
EVWSK300CM	Evago wire suspension kit 300cm

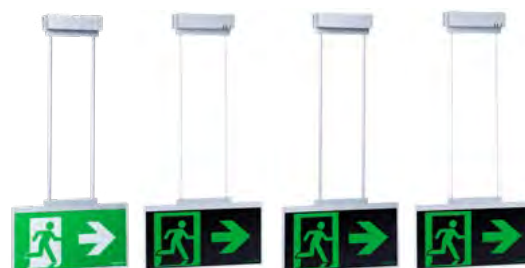

Evago rod/wire suspension kits available separately, see accessories

## Exit LED evago

p-Range | Nexus®



### Exit LED evago Nexus®: p-Range product features

- 5 year warranty
- LED technology 100,000 hours plus lamp life
- Lithium iron phosphate battery
- 24m viewing distance
- 0.5m and 1m rod suspension kit available as a standard option
- 1.5m and 3m wire suspension kit available as a standard option
- Nexus® monitored, either cabled or wireless

### Platinum exit LED evago ceiling mount



Order code	Description	Mounting
<b>Nexus products</b>		Ceiling mount
PELEVRFSCM-1	Platinum exit LED evago Nexus RF ceiling mount single sided picto	
PELEVRFSCM-2	Platinum exit LED evago Nexus RF ceiling mount single sided <picto	
PELEVRFSCM-3	Platinum exit LED evago Nexus RF ceiling mount single sided picto>	
PELEVRFSCM-5	Platinum exit LED evago Nexus RF ceiling mount double sided picto	
PELEVRFSCM-6	Platinum exit LED evago Nexus RF ceiling mount double sided picto AOW	
<b>Spare parts</b>		
03-YPMA011	Battery LiFePO4 3.2V 1.14Ah	
<b>Additional features</b>		
Architecturally pleasing frameless slim line design		
First-fix plate for quick and easy installation and maintenance		

### Platinum exit LED evago theatre mask ceiling mount



Order code	Description	Mounting
<b>Nexus products</b>		Ceiling mount
PELEVBRFSCM-1	Platinum exit LED evago theatre mask Nexus RF ceiling mount single sided picto	
PELEVBRFSCM-2	Platinum exit LED evago theatre mask Nexus RF ceiling mount single sided <picto	
PELEVBRFSCM-3	Platinum exit LED evago theatre mask Nexus RF ceiling mount single sided picto>	
PELEVBRFSCM-5	Platinum exit LED evago theatre mask Nexus RF ceiling mount double sided picto	
PELEVBRFSCM-6	Platinum exit LED evago theatre mask Nexus RF ceiling mount double sided picto AOW	
<b>Spare parts</b>		
03-YPMA011	Battery LiFePO4 3.2V 1.14Ah	
<b>Additional features</b>		
Architecturally pleasing frameless slim line design		
First-fix plate for quick and easy installation and maintenance		

### Accessories

Order code	
EVRSK50CM	Evago rod suspension kit 50cm
EVRSK100CM	Evago rod suspension kit 100cm
EVWSK150CM	Evago wire suspension kit 150cm
EVWSK300CM	Evago wire suspension kit 300cm



Evago rod/wire suspension kits available separately, see accessories





## Exit LED evago

p-Range

### Exit LED evago: p-Range product features

- 5 year warranty
- LED technology 100,000 hours plus lamp life
- Lithium iron phosphate battery
- 24m viewing distance

### Platinum exit LED evago wall mount



Order code	Description	Mounting
<b>Standard products</b>		Wall mount
PELEVMSWM-1	Platinum exit LED evago wall mount single sided picto	
PELEVMSWM-2	Platinum exit LED evago wall mount single sided <picto	
PELEVMSWM-3	Platinum exit LED evago wall mount single sided picto>	
<b>Spare parts</b>		
03-YPMA011	Battery LiFePO4 3.2V 1.14Ah	
<b>Additional features</b>		
Architecturally pleasing frameless slim line design		
First-fix plate for quick and easy installation and maintenance		

### Platinum exit LED evago theatre mask wall mount



Order code	Description	Mounting
<b>Standard products</b>		Wall mount
PELEVBMSWM-1	Platinum exit LED evago theatre mask wall mount single sided picto	
PELEVBMSWM-2	Platinum exit LED evago theatre mask wall mount single sided <picto	
PELEVBMSWM-3	Platinum exit LED evago theatre mask wall mount single sided picto>	
<b>Spare parts</b>		
03-YPMA011	Battery LiFePO4 3.2V 1.14Ah	
<b>Additional features</b>		
Architecturally pleasing frameless slim line design		
First-fix plate for quick and easy installation and maintenance		

## Exit LED evago

p-Range | Nexus®



### Exit LED evago Nexus®: p-Range product features

- 5 year warranty
- LED technology 100,000 hours plus lamp life
- Lithium iron phosphate battery
- 24m viewing distance
- Nexus® monitored, either cabled or wireless

### Platinum exit LED evago wall mount



Order code	Description	Mounting
<b>Nexus products</b>		Wall mount
PELEVRFSWM-1	Platinum exit LED evago Nexus RF wall mount single sided picto	
PELEVRFSWM-2	Platinum exit LED evago Nexus RF wall mount single sided <picto	
PELEVRFSWM-3	Platinum exit LED evago Nexus RF wall mount single sided picto>	
<b>Spare parts</b>		
03-YPMA011	Battery LiFePO4 3.2V 1.14Ah	
<b>Additional features</b>		
Architecturally pleasing frameless slim line design		
First-fix plate for quick and easy installation and maintenance		

### Platinum exit LED evago theatre mask wall mount



Order code	Description	Mounting
<b>Nexus products</b>		Wall mount
PELEVBRFSWM-1	Platinum exit LED evago theatre mask Nexus RF wall mount single sided picto	
PELEVBRFSWM-2	Platinum exit LED evago theatre mask Nexus RF wall mount single sided <picto	
PELEVBRFSWM-3	Platinum exit LED evago theatre mask Nexus RF wall mount single sided picto>	
<b>Spare parts</b>		
03-YPMA011	Battery LiFePO4 3.2V 1.14Ah	
<b>Additional features</b>		
Architecturally pleasing frameless slim line design		
First-fix plate for quick and easy installation and maintenance		



---

# Battens

**754**                      **e-Range**

**756**                      **s-Range**

**758**                      **p-Range**



---

For more detailed product information, please refer to the Stanilite website:

- [www.stanilite.com.au](http://www.stanilite.com.au)



## Battens


e-Range



### Economy batten standard emergency

- 1 year warranty
- Electronic control gear
- HPF - high power factor
- High temperature NiCad batteries
- Optional acrylic prismatic diffuser or white galvanised steel wire guard
- Ambient operating temperature: +10°C to +40°C

### Economy batten standard emergency

	Order code	Description
	Standard products	
	ECBT118M	Economy batten 1x18W T8 maintained
	ECBT118N	Economy batten 1x18W T8 non-maintained
	ECBT218M	Economy batten 2x18W T8 maintained
	ECBT218S	Economy batten 2x18W T8 sustained
	ECBT136M	Economy batten 1x36W T8 maintained
	ECBT136N	Economy batten 1x36W T8 non-maintained
	ECBT236M	Economy batten 2x36W T8 maintained
	ECBT236S	Economy batten 2x36W T8 sustained
	Spare parts	
	03-01215P	Battery 3 cell NiCad 3.6V 4.0Ah (suits 18W)
	03-01216P	Battery 4 cell NiCad 4.8V 4.0Ah (suits 36W)
	Accessories	
	PR18	Diffuser kit to suit 18W battens
	PR136	Diffuser kit to suit 1x36W battens
	PR236	Diffuser kit to suit 2x36W battens
	WG18	Wire guard kit to suit 18W battens
	WG136	Wire guard kit to suit 1x36W battens
	WG236	Wire guard kit to suit 2x36W battens

**Note:** Lamps not supplied






## Battens

s-Range

### Battens – s-Range product features


- 3 year warranty
- Weatherproof rating IP65
- Long LED life 75,000 hours
- High temperature NiCad battery for longer life
- High colour rendering index CRI>80
- High efficiency frosted polycarbonate diffuser
- Motion detect option available

### Signature batten LED weatherproof – 4 foot



Order code	Description	Colour temp
Standard products		4,000K
SBLWAC45L	Batten LED weatherproof AC 4500 lumens	Impact rating IK08
SBLWAC45LMD	Batten LED weatherproof AC 4500 lumens with motion detect sensor	
SBLWEM45LM	Batten LED weatherproof EM 4500 lumens maintained	
SBLWEM45LMMD	Batten LED weatherproof EM 4500 lumens maintained with motion detect sensor	
Spare parts		
03-01016P	Battery 3 cell NiCad 3.6V 4.5Ah	
Additional features		
Typically 4,500 lumens on mains AC operation, 350 lumens in emergency operation		
Ambient operating temperature: AC -20°C to +40°C and EM +4°C to +40°C		

### Signature batten LED weatherproof - 5 foot

	Order code	Description	Colour temp
	Standard products		4,000K
	SBLWAC56L	Batten LED weatherproof AC 5600 lumens	Impact rating IK08
	SBLWAC56LMD	Batten LED weatherproof AC 5600 lumens with motion detect sensor	
	SBLWEM56LM	Batten LED weatherproof EM 5600 lumens maintained	
	SBLWEM56LMMD	Batten LED weatherproof EM 5600 lumens maintained with motion detect sensor	
	Spare parts		
	03-01016P	Battery 3 cell NiCad 3.6V 4.5Ah	
	Additional features		
	Ambient operating temperature: AC -20°C to +40°C and EM +4°C to +40°C		

### Accessories

Order code	
26-SSCSBLW	Stainless steel clips
26-SSSCSBLW	Stainless steel suspension clip
21-PCCSBLW	Polycarbonate clips
26-PBMD001	Wall mount bracket pair 45°

STOCK INDENT

## Battens

s-Range | Nexus®

### Battens – s-Range product features

- 3 year warranty
- Weatherproof rating IP65
- Long LED life 75,000 hours
- High temperature NiCad battery for longer life
- High colour rendering index CRI>80
- High efficiency frosted polycarbonate diffuser
- Motion detect option available
- Nexus® monitored, either cabled or wireless

### Signature batten LED weatherproof Nexus® – 4 foot



Order code	Description	Colour temp
<b>Nexus products</b>		4,000K
SBLWLX45LM	Batten LED weatherproof Nexus LX 4500 lumens maintained	
SBLWLX45LMMD	Batten LED weatherproof Nexus LX 4500 lumens maintained with motion detect sensor	
SBLWRF45LM	Batten LED weatherproof Nexus RF 4500 lumens maintained	
SBLWRF45LMMD	Batten LED weatherproof Nexus RF 4500 lumens maintained with motion detect sensor	
<b>Spare parts</b>		
03-CBMA035P	Battery 4 cell NiCad 4.8V 4.5Ah	
<b>Additional features</b>		
Typically 4,500 lumens on mains AC operation, 620 lumens in emergency operation		
Ambient operating temperature: +4°C to +40°C		

### Signature batten LED weatherproof Nexus - 5 foot



Order code	Description	Colour temp
<b>Nexus products</b>		4,000K
SBLWLX56LM	Batten LED weatherproof Nexus LX 5600 lumens maintained	
SBLWLX56LMMD	Batten LED weatherproof Nexus LX 5600 lumens maintained with motion detect sensor	
SBLWRF56LM	Batten LED weatherproof Nexus RF 5600 lumens maintained	
SBLWRF56LMMD	Batten LED weatherproof Nexus RF 5600 lumens maintained	
<b>Spare parts</b>		
03-CBMA035P	Battery 4 cell NiCad 4.8V 4.5Ah	
<b>Additional features</b>		
Ambient operating temperature: AC -20°C to +40°C and EM +4°C to +40°C		

### Accessories

Order code	
26-SSCSBLW	Stainless steel clips
26-SSSCSBLW	Stainless steel suspension clip
21-PCCSBLW	Polycarbonate clips
26-PBMD001	Wall mount bracket pair 45°



## Battens


p-Range



### Battens – p-Range product features


- 5 year warranty
- Weatherproof rating IP65
- Long LED life 75,000 hours
- Lithium iron phosphate battery
- High efficiency frosted polycarbonate diffuser
- Motion detect option available

### Platinum batten LED weatherproof – 4 foot



Order code	Description	Colour temp
Standard products		4,000K
PBLWAC35L	Platinum batten LED weatherproof AC 3500 lumens	Impact rating IK08
PBLWAC35LMD	Platinum batten LED weatherproof AC 3500 lumens with motion detect sensor	
PBLWEM35LM	Platinum batten LED weatherproof EM 3500 lumens maintained	
PBLWEM35LMMD	Platinum batten LED weatherproof EM 3500 lumens maintained with motion detect sensor	
Spare parts		
03-01307P	Battery LiFePO4 6.4V 3.2Ah	
Additional features		
Typically 3,500 lumens on mains AC operation, 600 lumens in emergency operation		
Ambient operating temperature: AC -20°C to +40°C and EM +10°C to +40°C		

### Platinum batten LED weatherproof – 5 foot



Order code	Description	Colour temp
Standard products		4,000K
PBLWAC46L	Platinum batten LED weatherproof AC 4600 lumens	Impact rating IK08
PBLWAC46LMD	Platinum batten LED weatherproof AC 4600 lumens with motion detect sensor	
PBLWEM46LM	Platinum batten LED weatherproof EM 4600 lumens maintained	
PBLWEM46LMMD	Platinum batten LED weatherproof EM 4600 lumens maintained with motion detect sensor	
Spare parts		
03-01307P	Battery LiFePO4 6.4V 3.2Ah	
Additional features		
Typically 3,500 lumens on mains AC operation, 600 lumens in emergency operation		
Ambient operating temperature: AC -20°C to +40°C and EM +10°C to +40°C		

### Accessories

Order code	
26-SSCSBLW	Stainless steel clips
26-SSSCSBLW	Stainless steel suspension clip
21-PCCSBLW	Polycarbonate clips
26-PBMD001	Wall mount bracket pair 45°

## Battens

p-Range | Nexus®

### Battens – p-Range Nexus product features

- 5 year warranty
- Weatherproof rating IP65
- Long LED life 75,000 hours
- Lithium iron phosphate battery
- High efficiency frosted polycarbonate diffuser
- Motion detect option available
- Nexus® monitored, either cabled or wireless

### Platinum batten LED weatherproof Nexus® – 4 foot



Order code	Description	Colour temp
<b>Nexus products</b>		4,000K
PBLWLX35LM	Platinum batten LED weatherproof Nexus LX 3500 lumens maintained	<b>Impact rating</b> IK08
PBLWLX35LMMD	Platinum batten LED weatherproof Nexus LX 3500 lumens maintained with motion detect sensor	
PBLWRF35LM	Platinum batten LED weatherproof Nexus RF 3500 lumens maintained	
PBLWRF35LMMD	Platinum batten LED weatherproof Nexus RF 3500 lumens maintained with motion detect sensor	
<b>Spare parts</b>		
03-01307P	Battery LiFePO4 6.4V 3.2Ah	
<b>Additional features</b>		
Typically 3,500 lumens on mains AC operation, 600 lumens in emergency operation		
Ambient operating temperature: AC -20°C to +40°C and EM +10°C to +40°C		

### Platinum batten LED weatherproof Nexus® – 5 foot



Order code	Description	Colour temp
<b>Nexus products</b>		4,000K
PBLWLX46LM	Platinum batten LED weatherproof Nexus LX 4600 lumens maintained	<b>Impact rating</b> IK08
PBLWLX46LMMD	Platinum batten LED weatherproof Nexus LX 4600 lumens maintained with motion detect sensor	
PBLWRF46LM	Platinum batten LED weatherproof Nexus RF 4600 lumens maintained	
PBLWRF46LMMD	Platinum batten LED weatherproof Nexus RF 4600 lumens maintained with motion detect sensor	
<b>Spare parts</b>		
03-01307P	Battery LiFePO4 6.4V 3.2Ah	
<b>Additional features</b>		
Typically 3,500 lumens on mains AC operation, 600 lumens in emergency operation		
Ambient operating temperature: AC -20°C to +40°C and EM +10°C to +40°C		

### Accessories

Order code	
26-SSCSBLW	Stainless steel clips
26-SSSCSBLW	Stainless steel suspension clip
21-PCCSBLW	Polycarbonate clips
26-PBMD001	Wall mount bracket pair 45°



---

# Circular LED

**762**

**e-Range**

**763**

**s-Range**



---

For more detailed product information, please refer to the Stanilite website:

- [www.stanilite.com.au](http://www.stanilite.com.au)




Circular LED  
e-Range

e-Luna circular: e-Range product features

- 1 year warranty
- Ceiling or wall mount
- Long LED life 50,000 hours
- High colour rendering index CRI >80
- High temperature NiCad batteries
- Motion detect option available

Economy e-Luna circular LED

	Order code	Description	Colour temp
	Standard products		4,000K
	ECLAC22L	e-Luna circular LED IP20 AC 2200 lumens	IP rating IP20
	ECLAC22LMD	e-Luna circular LED IP20 AC 2200 lumens with motion detect sensor	
	ECLEM22LM	e-Luna circular LED IP20 AC 2200 lumens maintained	
	ECLEM22LMMD	e-Luna circular LED IP20 EM 2200 lumens maintained with motion detect sensor	
	Spare parts		
	03-01223	Battery 3 cell NiCad 3.6V 4.5Ah	
	Additional features		
	Indoor use only		
Low maintenance suitable for difficult to access areas			
Ambient operating temperature: +10°C to +40°C			





## Circular LED

s-Range | Standard and Nexus®

### Circular LED: s-Range product features

- 3 year warranty
- Ceiling or wall mount
- Weatherproof rating IP65
- Long LED life 50,000 hours
- High colour rendering index CRI >80
- High temperature NiCad batteries
- Motion detect option available

#### Signature circular LED weatherproof



Order code	Description	Colour temp
<b>Standard products</b>		4,000K
SCLWAC20L	Circular LED weatherproof AC 1045 lumens	
SCLWAC20LMD	Circular LED weatherproof AC 1045 lumens with motion detect sensor	<b>Impact rating</b> IK08
SCLWEM20LS	Circular LED weatherproof EM 1045 lumens sustained	
SCLWEM20LSMD	Circular LED weatherproof EM 1045 lumens sustained with motion detect sensor	
<b>Spare parts</b>		
03-01220	Battery 5 cell NiCad 6.0V 1.8Ah	
<b>Additional features</b>		
Low maintenance suitable for difficult to access areas		
Ambient operating temperature: AC +10°C to +40°C   EM 4°C to +40°C		

#### Signature circular LED weatherproof Nexus®



Order code	Description	Colour temp
<b>Nexus products</b>		4,000K
SCLWLX20LS	Circular LED weatherproof Nexus LX 1045 lumens sustained	
SCLWLX20LSMD	Circular LED weatherproof Nexus LX 1045 lumens sustained with motion detect sensor	<b>Impact rating</b> IK08
SCLWRF20LS	Circular LED weatherproof Nexus RF 1045 lumens sustained	
SCLWRF20LSMD	Circular LED weatherproof Nexus RF 1045 lumens sustained with motion detect sensor	
<b>Spare parts</b>		
03-01220	Battery 5 cell NiCad 6.0V 1.8Ah	
<b>Additional features</b>		
Nexus® monitored, either cabled or wireless		
Low maintenance suitable for difficult to access areas		
Ambient operating temperature: AC +10°C to +40°C   EM 4°C to +40°C		

**Note:** AC versions also available



---

# Flood lights

**766**

**s-Range**

**767**

**s-Range | Nexus®**



---

For more detailed product information, please refer to the Stanilite website:

- [www.stanilite.com.au](http://www.stanilite.com.au)



Flood light LED

s-Range

- Flood light LED: s-Range product features**
- 3 year warranty
  - LED technology 100,000 hours lamp life
  - Light output typically 600 lumens per lamp head
  - Beam angle 120° flood
  - Lamp heads can be rotated and tilted to suit particular installation requirements
  - Easy to maintain and low maintenance cost

Signature flood light LED



Order code	Description	Mounting
<b>Standard products</b>		Wall
FL210LED	LED flood light 2x10W 12V non-maintained	
<b>Spare parts</b>		
14-00061	Battery sealed lead acid 12V 7Ah	
15-10023	LED lamp 10W 12V	

Signature flood light LED weatherproof



Order code	Description	Mounting
<b>Standard products</b>		Wall
WPFL210LED	LED weatherproof flood light 2x10W 12V non-maintained	
<b>Spare parts</b>		
14-00061	Battery sealed lead acid 12V 7Ah	
15-10023	LED lamp 10W 12V	
<b>Additional features</b>		
Weatherproof rating IP65		
UV stabilised enclosure		



## Flood light LED

s-Range | Nexus®

### Flood light LED Nexus® : s-Range product features

- 3 year warranty
- LED technology 100,000 hours lamp life
- Light output typically 600 lumens per lamp head
- Beam angle 120° flood
- Lamp heads can be rotated and tilted to suit particular installation requirements
- Nexus® monitored, either cabled or wireless

### Signature flood light LED Nexus®



Order code	Description	Mounting
<b>Nexus products</b>		Wall
FLNXS210LED	LED flood light Nexus LX 2x10W 12V non-maintained	
FLNRF210LED	LED flood light Nexus RF 2x10W 12V non-maintained	
<b>Spare parts</b>		
14-00061	Battery sealed lead acid 12V 7Ah	
15-10023	LED lamp 10W 12V	
<b>Additional features</b>		
Easy to maintain and low maintenance cost		

### Signature flood light LED weatherproof Nexus®



Order code	Description	Mounting
<b>Nexus products</b>		Wall
WPFLNXS210LED	LED weatherproof flood light Nexus LX 2x10W 12V non-maintained	
WPFLNRF210LED	LED weatherproof flood light Nexus RF 2x10W 12V non-maintained	
<b>Spare parts</b>		
14-00061	Battery sealed lead acid 12V 7Ah	
15-10023	LED lamp 10W 12V	
<b>Additional features</b>		
Weatherproof rating IP65		
UV stabilised enclosure		
Easy to maintain and low maintenance cost		









Notes

Notes section containing 25 horizontal lines for writing.







PO Box 816, Hamilton 3240  
4-8 Mainstreet Place  
Hamilton 3200, New Zealand

Telephone +64 7 849 9119

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilisation of its contents – in whole or in parts – is forbidden without prior written consent of ABB.  
Copyright © 2018 ABB  
All rights reserved