

# PRODUCT DATASHEET

## LED Value Batten 1500 50 W TRI

**LED VALUE TRI COLOUR BATTEN | LED batten luminaires with slide switch for adjusting one of selectable light colors**



---

### AREAS OF APPLICATION

- Offices
- Residential interiors
- Office areas
- Hotels, restaurants, shops

---

### PRODUCT BENEFITS

- Homogenous light distribution
- Long lifetime thanks to LED technology
- Easy and quick installation
- Demand based lighting and energy saving thanks to motion and daylight sensor

---

### PRODUCT FEATURES

- Uniform illumination
- Three light colors selectable via slide switch
- Color rendering index  $R_a: \geq 80$
- Beam angle: 120°
- Type of protection: IP20
- Protection class: I
- Power factor: > 0.9
- Lifetime: up to 30,000 h



- Wattage adjustment via dip switch (version dependent)

## TECHNICAL DATA

### Electrical data

<b>Nominal wattage</b>	50.00 W
<b>Operating mode</b>	Integrated LED driver
<b>Nominal voltage</b>	220...240 V
<b>Power factor <math>\lambda</math></b>	> 0.90
<b>Mains frequency</b>	50/60 Hz

### Photometrical data

<b>Color temperature</b>	3000/4000/5700 K
<b>Luminous efficacy</b>	85/105/95 lm/W
<b>Light color (designation)</b>	Warm White/Cool White/Daylight
<b>Color rendering index Ra</b>	$\geq 80$

### Light technical data

<b>Beam angle</b>	120 °
-------------------	-------

### Dimensions & weight

<b>Length</b>	1450 mm
<b>Width</b>	65.0 mm
<b>Height</b>	65.0 mm
<b>Product weight</b>	1815.00 g

### Colors & materials

<b>Body material</b>	Polycarbonate (PC)/Polyvenyl
<b>Product color</b>	White
<b>Housing color</b>	White

### Temperatures & operating conditions

<b>Ambient temperature range</b>	-20...+40 °C
----------------------------------	--------------

### Lifespan

<b>Number of switching cycles</b>	15000
-----------------------------------	-------

### Additional product data

<b>Mounting type</b>	Surface
<b>Mounting location</b>	Wall

Capabilities

<b>Dimmable</b>	No
<b>Type of connection</b>	Terminal, 3-Pole (L, N, PE)
<b>LED module replaceable</b>	Not replaceable


Certificates & standards

<b>Protection class IK (shock resistance)</b>	IK03
<b>Protection class</b>	I
<b>Type of protection</b>	IP20

Logistical data

<b>Temperature range at storage</b>	-20...+80 °C
-------------------------------------	--------------

Light Distribution

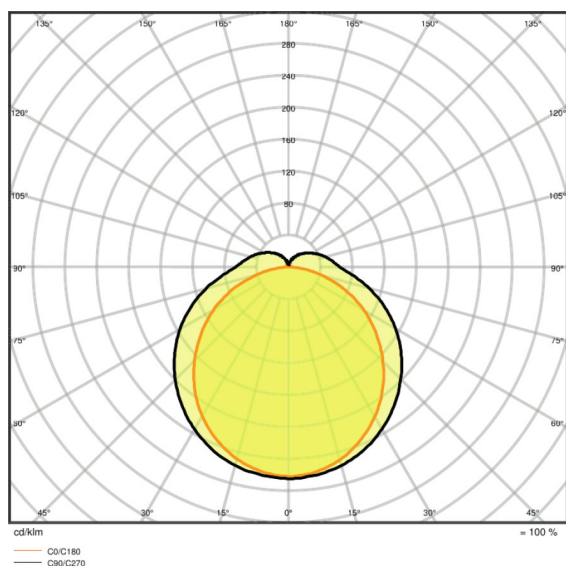

LDC typ polar

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075358607	Folding carton box 1	1457 mm x 90 mm x 90 mm	2147.00 g	11.80 dm <sup>3</sup>
4058075358614	Shipping carton box 8	1480 mm x 195 mm x 375 mm	18521.00 g	108.23 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

---

**DISCLAIMER**

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.