




PANEL PRO



PANEL PRO

The Panel Pro designed to cater to diverse lighting needs at an affordable price. Featuring dual wattage, this panel is complemented by a low-glare diffuser (UGR<19) making it perfect for both office settings and classrooms. Its versatile TRI colour switch allows for seamless transitions, ensuring optimal lighting for any application. Built for lasting performance, the IP54-rated luminaire is dust-protected and suitable for damp environments, providing reliable, adaptable lighting solutions.

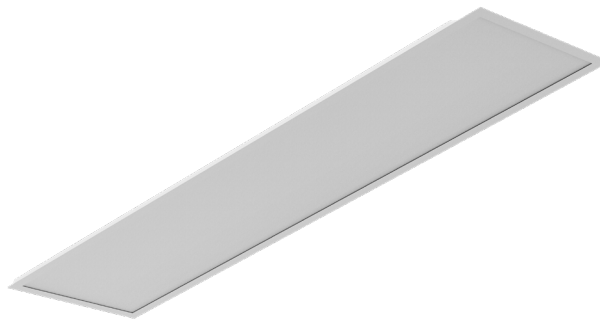

FEATURES AND BENEFITS

- Dual wattage version: 33/20W, 49/30W
DALI version: 33W, 49W
- Available in 600x600mm, 300x1200mm and 600x1200mm
- Tri colour in 3000K, 3500K, and 4000K
- High efficacy up to 120lm/W
- Beam angle 90°
- Low glare rating of UGR<19
- High colour rendering index CRI>90
- IP54
- SDCM<3 for 3000K and 4000K
- Pre-wired with 1.5m flex and plug
- Lifetime 60000 hours


AREAS OF APPLICATION

- Offices and conference rooms
- Reception areas and foyers
- Entrances and hallways
- Retail and hospitality
- Libraries and schools

AVAILABLE SIZES



Dual wattage: 33/20W
DALI: 33W
595x595x32mm



Dual wattage: 33/20W
DALI: 33W
1195x295x32mm




Dual wattage: 49/30W
DALI: 49W
1195x595x34mm


SPECIFICATIONS

Wattage	Dual Wattage: 33/20W, 49/30W, DALI: 33W, 49W	Electrical Classification	Class II
Lumens	4000, 6000	Connection Type	Pre-wired with 1.5m flex and plug
lm/W	120	PF	>0.9
CRI	>90	Voltage	220-240V
CCT	3000/3500/4000K	Frequency	50/60Hz
IP Rating	IP54(Front)/IP20(Back)	Surge Protection	1KV
Dimmable	DALI option available	Mounting Type	Recessed mounting
Housing Material	Aluminium/PS	Operating Temperature	-10°C to 40°C
Beam Angle	90°	Lifetime	60000 hours
SDCM	<3 (3000K and 4000K)	Warranty	5 years
UGR	<19		


PHOTOMETRICS




DIMENSIONS



Dual wattage: 33/20W
DALI: 33W
595x595x32mm

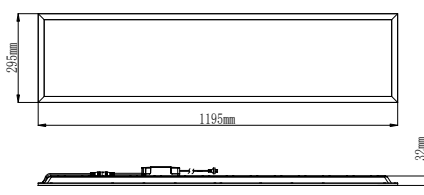

Dual wattage: 33/20W
DALI: 33W
1195x295x32mm

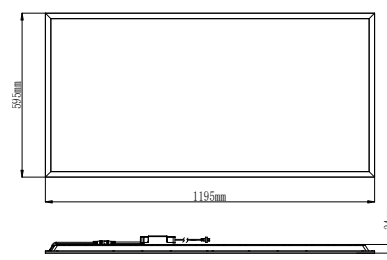

Dual wattage: 49/30W
DALI: 49W
1195x595x34mm

ORDERING CODES - PANEL PRO



Product name	EAN10	Model number	W	lm	K	Δ	lm/W		$\frac{l}{w}$	$\frac{w}{h}$	$\frac{h}{h}$
--------------	-------	--------------	---	----	---	----------	------	--	---------------	---------------	---------------

DUAL WATTAGE

LDPFM PAN0606 33/20W TRIU19S3 6X1AULEDV	4099854398759	OSR0398759	33/ 20	4000/ 2400	3000/ 3500/ 4000	90	120	FAST CONNECTOR	595	595	32
LDPFM PAN0312 33/20W TRIU19S3 6X1AULEDV	4099854398773	OSR0398773	33/ 20	4000/ 2400	3000/ 3500/ 4000	90	120	FAST CONNECTOR	295	1195	32
LDPFM PAN0612 49/30W TRIU19S3 4X1AULEDV	4099854398797	OSR0398797	49/ 30	6000/ 3600	3000/ 3500/ 4000	90	120	FAST CONNECTOR	595	1195	34

DALI



LDPFM PAN0606 33WTRI U19S3DALI6X1AULEDV	4099854398810	OSR0398810	33	4000	3000/ 3500/ 4000	90	120	DALI	595	595	32
LDPFM PAN0312 33WTRI U19S3DALI6X1AULEDV	4099854398834	OSR0398834	33	4000	3000/ 3500/ 4000	90	120	DALI	295	1195	32
LDPFM PAN0612 49WTRI U19S3DALI4X1AULEDV	4099854398858	OSR0398858	49	6000	3000/ 3500/ 4000	90	120	DALI	595	1195	34