



LED VALUE & LED PERFORMANCE EMERGENCY LIGHTING



LED VALUE & LED PERFORMANCE EMERGENCY LIGHTING

EMERGENCY LIGHTING YOU CAN RELY ON

Some of our products are so flexible that they cannot be assigned to any one classic area of application. That applies, for example, to our emergency lighting. And flexibility is everything in this segment.

Whether for the shop, hotel, industry or office sector, the products in our emergency range comply with statutory regulations and combine quality with impressive practicality. In other words, you can rely on emergency lighting from LEDVANCE.

Your Expectations

Emergency lighting must meet so many demands – and sometimes more than others. The luminaires have to offer flexible mounting options and provide the prescribed illuminance even in smoky rooms. Battery life must be adequate to cope with power outages. And attractive design can turn emergency lighting from a necessary tool into a real eye-catcher.

Emergency - Our Highlights For Your Lighting!


Always stay safe in public buildings or on business premises with emergency lighting from LEDVANCE. Our portfolio for emergency lighting systems provides the ideal basis for tailor-made solutions for a very wide variety of applications – for example with standard-compliant downlights for anti-panic and escape route lighting. Outdoor wall, indoor wall and ceiling luminaires can be installed with any standard emergency pictograms to suit specific circumstances. All LEDVANCE Emergency lighting is AS/NZS 2293, AS/NZS 60598 complaint



TECHNICAL INFORMATION

EXIT SIGN

Value running man exit sign with 6 interchangeable PVC legends is easy to install thanks to screw terminal. LEDVANCE Exit Sign is a classic, surface mounted, single side design. With a maintained lithium battery and a discharge time of up to 3 hours. Indoor application only IP20 and 24m viewing distance.

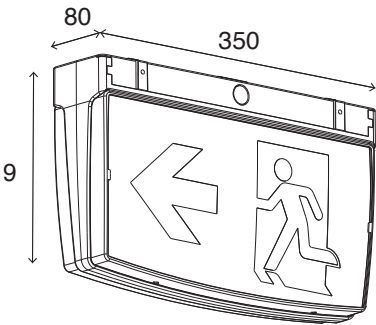


IC	EAN10	Product name	Model Number	Wattage	CCT	IP	Length (mm)	Width (mm)	Height (mm)	Converter Length (mm)	Converter Width (mm)	Converter Height (mm)	Weight (g)	Viewing Distance	Terminal Block	Maintained	Classification	Charging Time	Discharge Time	Battery Type	Product colour	Warranty
AC241310055	4058075443303	LDVAL EXIT 3W 350MM 6X1 AU LEDV	LDVEXIT	3W	6500K	20	350	80	219	N/A	N/A	N/A	970g	24m	Screw	Maintained	N/A	24/16h	3H/2H	LiFePO4	White	5 years

*3year warranty on battery

5IN1 EXIT SIGN

Thanks to 3 different mounting brackets and its double-sided edge lit acrylic face, this LEDVANCE 5 in 1 exit sign will suit any of your application needs with a quick and simple installation thanks to screw terminal. This stylish and versatile exit sign comes complete with 7 interchangeable PVC legends. Choose from suspending, side-mounting or recessing, with a maintained lithium battery and a discharge time of up to 3 hours. Indoor application only IP20 and 24m viewing distance.

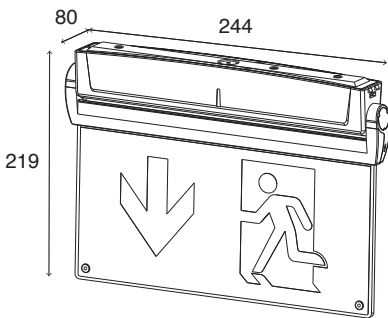


IC	EAN10	Product name	Model Number	Wattage	CCT	IP	Length (mm)	Width (mm)	Height (mm)	Converter Length (mm)	Converter Width (mm)	Converter Height (mm)	Weight (g)	Viewing Distance	Terminal Block	Maintained	Classification	Charging Time	Discharge Time	Battery Type	Product colour	Warranty
AC241320055	4058075443327	LDVAL EXIT MULTI 2W 344MM 6X1 AU LEDV	LDVEXIT5IN1	2	6500K	20	244	80	219	N/A	N/A	N/A	769g	24m	Screw	Maintained	N/A	24/16h	3H/2H	LiFePO4	White	5 years

*3year warranty on battery

TECHNICAL INFORMATION

EXIT BLADE

Stylish running man exit blade offers an architectural feel with its slim, double-sided edge lit acrylic face and 7 interchangeable PVC legends. With a maintained lithium battery and a discharge time of up to 3 hours. Indoor application IP20, IC rating and 24m viewing distance. Also available in black for theatre lighting.

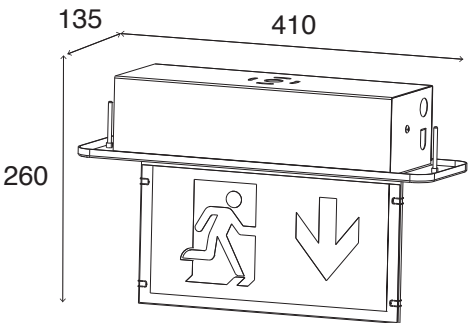


IC	EAN10	Product name	Model Number	Wattage	CCT	IP	Length (mm)	Width (mm)	Height (mm)	Converter Length (mm)	Converter Width (mm)	Converter Height (mm)	Weight (g)	Viewing Distance	Terminal Block	Maintained	Classification	Charging Time	Discharge Time	Battery Type	Product colour	Warranty
AC241330055	4058075443341	LDVAL EXIT BLADE 2W 410MM 4X1AU LEDV	LDVEXITBLADE	2	6500K	20	410	135	260	N/A	N/A	N/A	1938g	24m	Screw	Maintained	N/A	24/16h	3H/2H	LiFePO4	White	5 years
AC241360055	4058075443426	LDVAL EXIT BLADE 2W410MMBK4X1AU LEDV	LDVEXITBLADEBK	2	6500K	20	410	135	260	N/A	N/A	N/A	1938g	24m	Screw	Maintained	N/A	24/16h	3H/2H	LiFePO4	Black	5 years

*3year warranty on battery

EX-BOX

High performance LEDVANCE EX-BOX is a single sided, running man exit sign, complete with 4 PVC interchangeable legends. This stylish yet convenient emergency light also has extra security as it is designed with 5 SMD chips on the base for illumination of the exit door. Indoor application only IP20 and 24m viewing distance. Also available in black for theatre lighting.

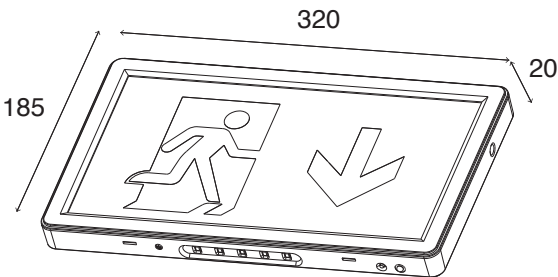



IC	EAN10	Product name	Model Number	Wattage	CCT	IP	Length (mm)	Width (mm)	Height (mm)	Converter Length (mm)	Converter Width (mm)	Converter Height (mm)	Weight (g)	Viewing Distance	Terminal Block	Maintained	Classification	Charging Time	Discharge Time	Battery Type	Product colour	Warranty
AC241380055	4058075443488	LDPFM EXIT BOX 3W 320MM 10X1 AU LEDV	LDVEX-BOX	3	6500K	20	320	20	185	N/A	N/A	N/A	615	24m	Screw	Maintained	N/A	24/16h	3H/2H	LiFePO4	White	5 years
AC254790055	4058075462656	LDPFM EXIT BOX 3W 320MM 10X1 BK AU LEDV	LDVEX-BOXBK	3	6500K	20	320	20	185	N/A	N/A	N/A	615	24m	Screw	Maintained	N/A	24/16h	3H/2H	LiFePO4	Black	5 years

*3year warranty on battery

TECHNICAL INFORMATION

FIRELIGHT

Recessed Firelight luminaire provides high visibility whilst remaining discreet and aesthetically pleasing. This non-maintained fitting comes complete with 1.5m flex and plug for a quick and easy installation. Choose from a wide area and corridor mode lenses to suit your application needs. Indoor application only IP20 and IC4 . Also available in black for theatre lighting.

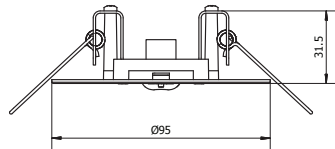
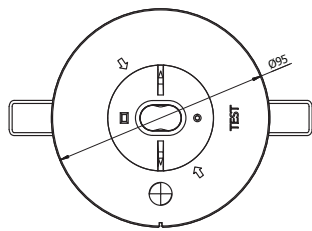


IC	EAN10	Product name	Model Number	Wattage	CCT	IP	Length (mm)	Width (mm)	Height (mm)	Cut Out (mm)	Converter Length (mm)	Converter Width (mm)	Converter Height (mm)	Weight (g)	Viewing Distance	Terminal Block	Maintained	Classification	Charging Time	Discharge Time	Battery Type	Product colour	Warranty
AC241340055	4058075443365	LDVAL FIRELIGHT 3W 145MM 20X1 AU LEDV	LDVEMFIRELIGHT	3	6500K	20	145	145	31.5	59	206	43	23	360	N/A	Prewired	Non maintained	D40/CO: D40	24/16h	3H/2H	LiFePO4	White	5 years
AC248360055	4058075443549	LDVAL FIRELIGHT 3W 145MM BK20X1AU LEDV	LDVEMFIRELIGHTBK	3	6500K	20	145	147.5	31.5	59	206	43	23	360	N/A	Prewired	Non maintained	D40/ CO: D40	24/16h	3H/2H	LiFePO4	Black	5 years

*3year warranty on battery

MINI FIRELIGHT

LEDVANCE LED VALUE High performance Mini Firelight Range is the ultimate recessed luminaire when it comes to discreet emergency lighting. With an overall diameter of just 40mm, both wide and corridor versions are suitable for all commercial applications. This non-maintained fitting comes complete with 1.5m flex and plug for a quick and easy installation. Indoor application only IP20 and IC4 compliant. Also available in black for theatre lighting.

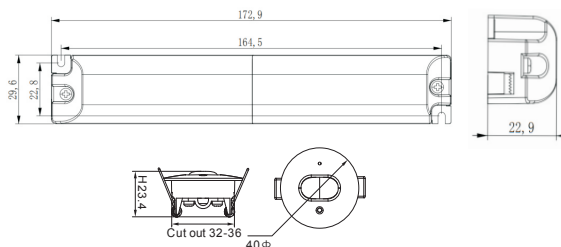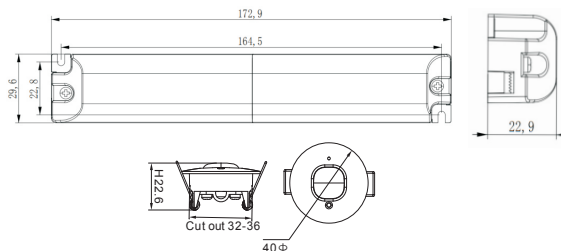


IC	EAN10	Product name	Model Number	Wattage	CCT	IP	Length (mm)	Width (mm)	Height (mm)	Cut Out (mm)	Converter Length (mm)	Converter Width (mm)	Converter Height (mm)	Weight (g)	Viewing Distance	Terminal Block	Maintained	Classification	Charging Time	Discharge Time	Battery Type	Product colour	Warranty
AC241370155	4058075494183	LDVAL FIRELIGHT 0MINI 2W40MM 42X1AULEDV	LDVEMFLMINIO	2	6000K	20	40	40	23	32-36	173	29.6	23	230g	N/A	Prewired	Non maintained	D20	16h	2H	LiFePO4	White	5 years
AC248370155	4058075494206	LDVAL FIRELIGHT 0MINI2W40MMBK42X1AULEDV	LDVEMFLMINIOBK	2	6000K	20	40	40	23	32-36	173	29.6	23	230g	N/A	Prewired	Non maintained	D12.5	16h	2H	LiFePO4	Black	5 years
AC248380155	4058075494220	LDVAL FIRELIGHT 0MINI 2W40MM 42X1AULEDV	LDVEMFLMINIC	2	6500K	20	40	40	23	32-36	173	29.6	23	230g	N/A	Prewired	Non maintained	CO: D20	16h	2H	LiFePO4	White	5 years
AC248390155	4058075494244	LDVAL FIRELIGHT 0MINI2W40MMBK42X1AULEDV	LDVEMFLMINIOBK	2	6500K	20	40	40	23	32-36	173	29.6	23	230g	N/A	Prewired	Non maintained	CO: D20	16h	2H	LiFePO4	Black	5 years

*3year warranty on battery

TECHNICAL INFORMATION

TWIN SECURITY SPOT – LOW POWER

LEDVANCE Twin Security Spot is a non-maintained, surface mounted emergency luminaire with a high ingress protection rating of IP65, suitable for both indoor and outdoor applications. The adjustable Twin Spot is designed with a large screw terminal block for a quick and easy installation

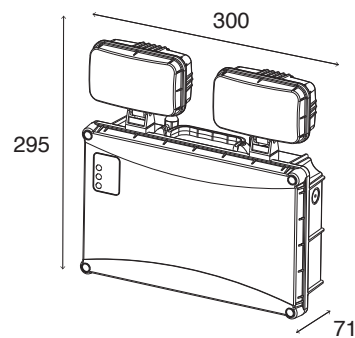

IC	EAN10	Product name	Model Number	Wattage	CCT	IP	Length (mm)	Width (mm)	Height (mm)	Converter Length (mm)	Converter Width (mm)	Converter Height (mm)	Weight (g)	Viewing Distance	Terminal Block	Maintained	Classification	Charging Time	Discharge Time	Battery Type	Product colour	Warranty
AC241350055	4058075443402	LDVAL EM TWIN 1W IP65 300MM GX1 AU LEDV	LDVEMTWINIP65	1	6500K	65	300	71	295	N/A	N/A	N/A	1280	N/A	Screw	Non maintained	N/A	24/16h	3H/2H	LiFePO4	White	5 years

*3year warranty on battery



ABOUT LEDVANCE

With offices in more than 50 countries and business activities in more than 140 countries, LEDVANCE is one of the world's leading general lighting providers for professional users and end consumers. Having emerged from the general lighting business of OSRAM GmbH, LEDVANCE offers a wide-ranging assortment of LED luminaires for a broad spectrum of application areas, intelligent lighting products for Smart Homes and Buildings, one of the largest LED lamps portfolios in the industry as well as traditional light sources.



LEDVANCE

LEDVANCE PTY LTD
Head Office
Suite 2.1A 394 Lane Cove Road
Macquarie Park NSW 2113
Phone 1300 467 726
www.ledvance.com.au