

INLINE RCD

PRODUCT DATASHEET


An indispensable electrical safety companion, the RCD (residual current device) is essential for tradespeople utilizing power tools, DIY enthusiasts navigating home projects, and campers inhabiting camping grounds, among others.

- 1.5mm² heavy duty cable
- 10A or 15A x 30mA RCD Protection
- 2/5/10/15m Length
- 10A moulded plug and socket
- Fully compliant with AS/NZS standards
- IP66 Rated



Product Codes

Code:	Amperage (A):	Length (M):
ELRCD10M2	10	2
ELRCD15M5	15	5
ELRCD15M10	15	10
ELRCD15M15	15	15

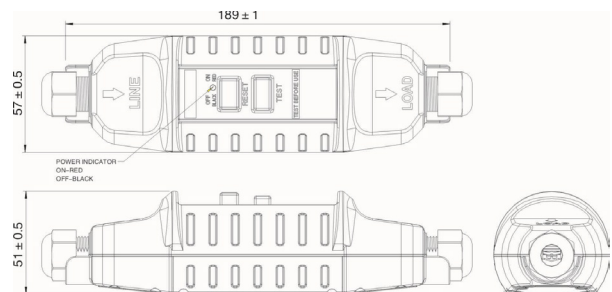

Specifications

Rated Voltage (V):	220~240
Frequency (Hz):	50/60
Rated Current (A):	10 or 15
Polarity Number (Pole):	Live, Neutral, Earth
Rated Leakage Tripping Current (mA):	30
Rated Leakage No Tripping Current (mA):	15
Max Tripping Time (s):	≤0.10
IP Rating:	IP66 (EN60529/IEC529)
Operation Temperature:	-25°C – +40°C
Air Relative Degree of Humidity:	≤93% (25°C)

Dimensions

Length (mm):	189
Width (mm):	57
Height (mm):	51

Features

- 1.5mm² heavy duty cable
- 10A / 15A x 30mA RCD Protection
- 2/5/10/15M Length
- 10A moulded plug and socket
- Fully compliant with AS/NZS standards

Please ensure the test button can be tripped before using RCD lead. The "test" and "reset" button cannot be used as an "on-off" switch.