

# **PRODUCT DATASHEET** HE SL 14 W/865

SMARTLUX T5 HE | Tubular fluorescent lamps 16 mm, high efficiency







#### **TECHNICAL DATA**


#### Electrical data

Nominal voltage	220 V	
Rated lamp efficacy (HF data 25 °C)	Under clarification by authority and standardization body	
Rated wattage	14.00 W	
Nominal wattage	14.00 W	

#### Photometrical data

Color rendering index Ra	≥80
Rated luminous flux	1100 lm
Luminous flux at 25 °C	1100 lm
Luminous flux at 35 °C	1300 lm
Light color	865
Rated color temperature	6500 K
Nominal luminous flux	1100 lm
Rated LLMF at 2,000 h	0.95
Rated LLMF at 4,000 h	0.92
Rated LLMF at 6,000 h	0.91
Rated LLMF at 8,000 h	0.90
Rated LLMF at 12,000 h	0.90
Rated LLMF at 16,000 h	0.90
Rated LLMF at 20,000 h	0.89
Color temperature	6500 K
Luminous flux	1100 lm
Color rendering index Ra	≥80

# Dimensions & weight

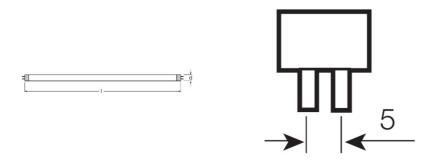

Tube diameter	16 mm
Length	549.0 mm

Length with base excl. base pins/connection	549.00 mm
<b>Diameter</b> 1	16.0 mm
Maximum diameter	16.0 mm

# Temperatures & operating conditions

#### Lifespan

Lifespan	20000 h
Rated lamp survival factor at 2,000 h	0.99
Rated lamp survival factor at 4,000 h	0.99
Rated lamp survival factor at 6,000 h	0.99
Rated lamp survival factor at 8,000 h	0.99
Rated lamp survival factor at 12,000 h	0.99
Rated lamp survival factor at 16,000 h	0.90
Rated lamp survival factor at 20,000 h	0.50
Operation mode LLMF/LSF	HF
Rated lamp life time	20000 h
Nominal lamp life time	20000 h

# Additional product data

	Base (standard designation)	G5
	Mercury content	1.2 mg
	Show WEEE picto	Yes


#### Capabilities

Suitable	for indoor	Yes

### Certificates & standards


Energy efficiency class	A
Energy efficiency class	A
Energy consumption	16 kWh/1000h

#### **Light Distribution**

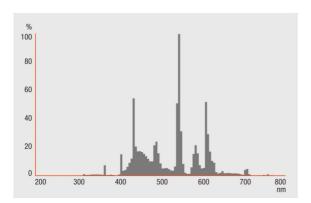

Spectral power distribution

Wiring Diagram





Wiring diagram

Wiring diagram

**LOGISTICAL DATA** 

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4008321335289	Sleeves 1	563 mm x 18 mm x 18 mm	55.00 g	0.18 dm <sup>3</sup>
4052899046641	Shipping carton box 20	591 mm x 104 mm x 88 mm	1528.00 g	5.41 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

#### **DISCLAIMER**

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.